


NOTE:

- 1.Electrical properties:
 - 1.ALL COMPONENTS ARE RoHS COMPLIANT.
 - 2.100% OPEN AND SHORT TEST.
 - 3.CONDUCTOR RESISTANCE:3 OHMS
 - 4.INSULATION RESISTANCE:10 MEGOHMS.
 - 5.HI-POT:DC200V/0.01S
 - 6.PC TEST 1920*1200 60HZ PASS
- 2 ROHS 2.0 and REACH

PRINTING: High Speed Cable 20276 80 C 30V VW-1

MODEL LIST

Model	Length	DSP
11.99.5800	1000mm	1920*1200 60Hz
11.99.5801	1500mm	1920*1200 60Hz
11.99.5802	2000mm	1920*1200 60Hz
11.99.5803	3000mm	1920*1200 60Hz
11.99.5804	5000mm	1920*1200 60Hz

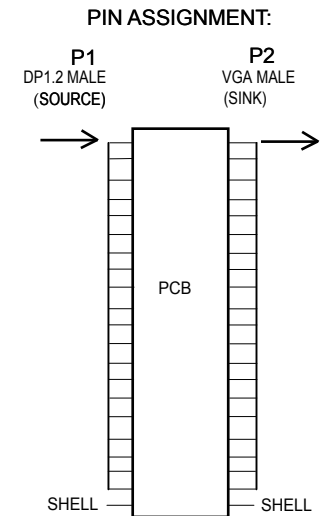

MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY
⑥	DUST COVER	PE, COLOR: TRANSPARENT	2
⑤	CABLE	(1/0.32BC*1P+1/0.32BC+AM)*5C+1/0.32BC*4C+AM+1/0.32BC+160/0.12ALMG+PVC OD:7.0±0.2MM COLOR: BLACK	L
④	OUTER MOLD	BLACK ABS	1
③	SCREW	#4-40 UNC,HOOD MOLDED:BLACK PVC	2
②	CONNECTOR	VGA MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
①	CONNECTOR	DP1.2 MALE, GOLD PLATED PIN,GOLD PLATED SHELL	1

SECOMP				
NAME	VALUE DisplayPort to VGA Cable, DP-VGA, M/M, black			
MODEL No.	11.99.5800/11.99.5801	MAPE	TOLERANCE	
	11.99.5802/11.99.5803		X. ±1.00	
11.99.5804	X.X ±0.50			
APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
			PAGE	1/1