



RoHS Compliant

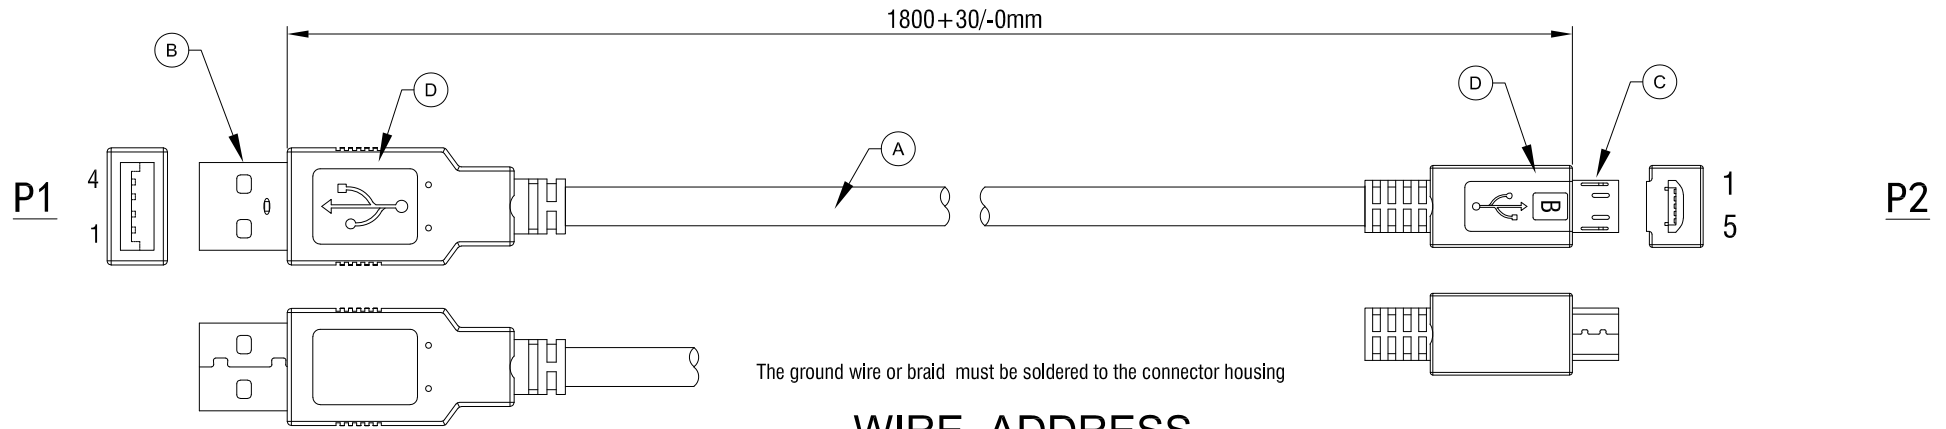

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

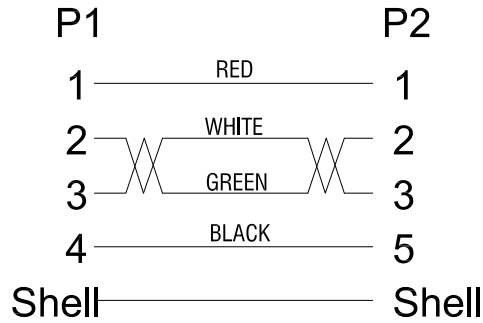

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

- Minimum operation temperature : 0 degree
- Maximum operating temperature 65 degree

| | | | | | | | |
|--------|---|----------|------|--|-------------------|------------------|-----------------|
| D | 45P PVC BLACK | | G | ROLINE USB AM/ MICRO USB BM CABLE, 1.8M, BLACK | | | SECOMP |
| C | USB 2.0 Micro B5P MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U") | 1 | PCS | Item | 11.02.8752 | | |
| B | USB 2.0 A MALE(White Insulator, Shell Nickel Plated,Pin Gold Plated 30U") | 1 | PCS | Draw | Sam | Date: 2014.11.21 | |
| A | UL2725 28AWG*1P+24AWG*2C+ADB OD:5.0mm BLACK COLOR PVC JACKET(VW-1) | 1 | PCS | Approval | | | |
| NUMBER | PRODUCT SPECIFICATIONS | Quantity | Unit | Duty | F16 | BOM.NO: 10128 | |
| | | | | Sample NO. | Drawings of 1 (2) | | Proportion: 1:1 |
| | | | | Unit(mm) | | A4 | |