



RoHS Compliant

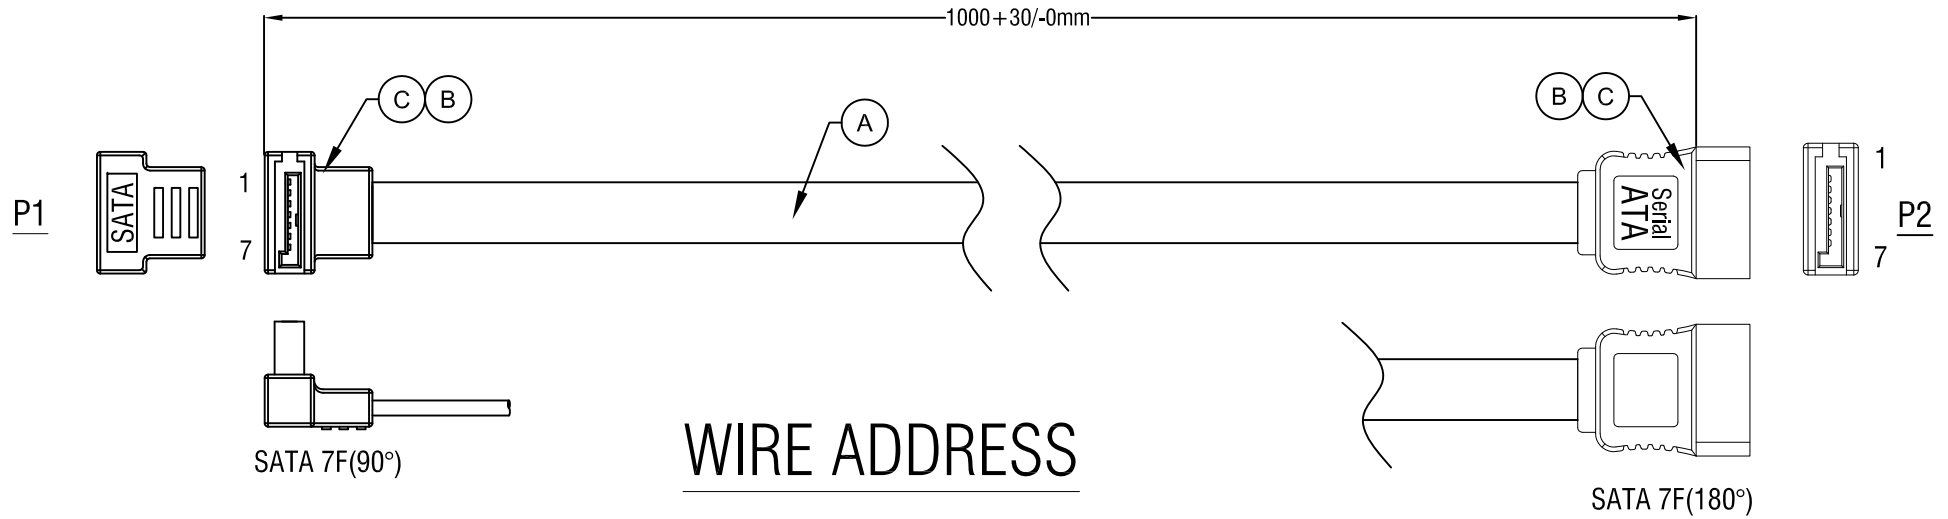

WIRE ADDRESS

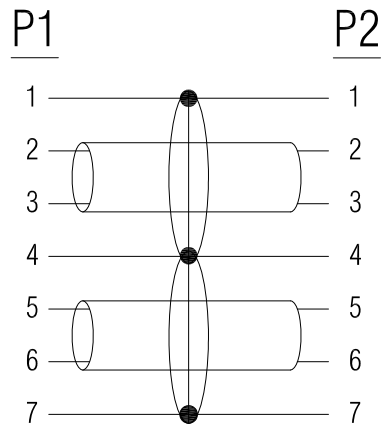

Electrical Test:
 1.100% TEST OPEN SHORT MIS-WIRE.
 2.CONTACT RESISTANCE:3Ω MAX.
 3.INSULATION RESISTANCE:5MΩ MIN.
 4.HI-POT:300V DC/10MS.

ROLINE Internal SATA 3.0 Gbit/s Cable, angled, 1 m		SECOMP
Item	11.03.1561	
Draw	Sam Date: 2022.06.22	
Approval		
Duty	F16 BOM.NO: 10445	
Sample NO.	Drawings of 1 (2)	Proportion: 1:1 Unit(mm) A4

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
C	45P PVC BLACK		G
B	SATA 7P FEMALE(Black Insulator)	2	PCS
A	UL2725 26#(2C+AL)*2F+3D, OD=2.3*7.8mm FLAT RED PVC JACKET.	1	PCS