



2000+30/-0mm

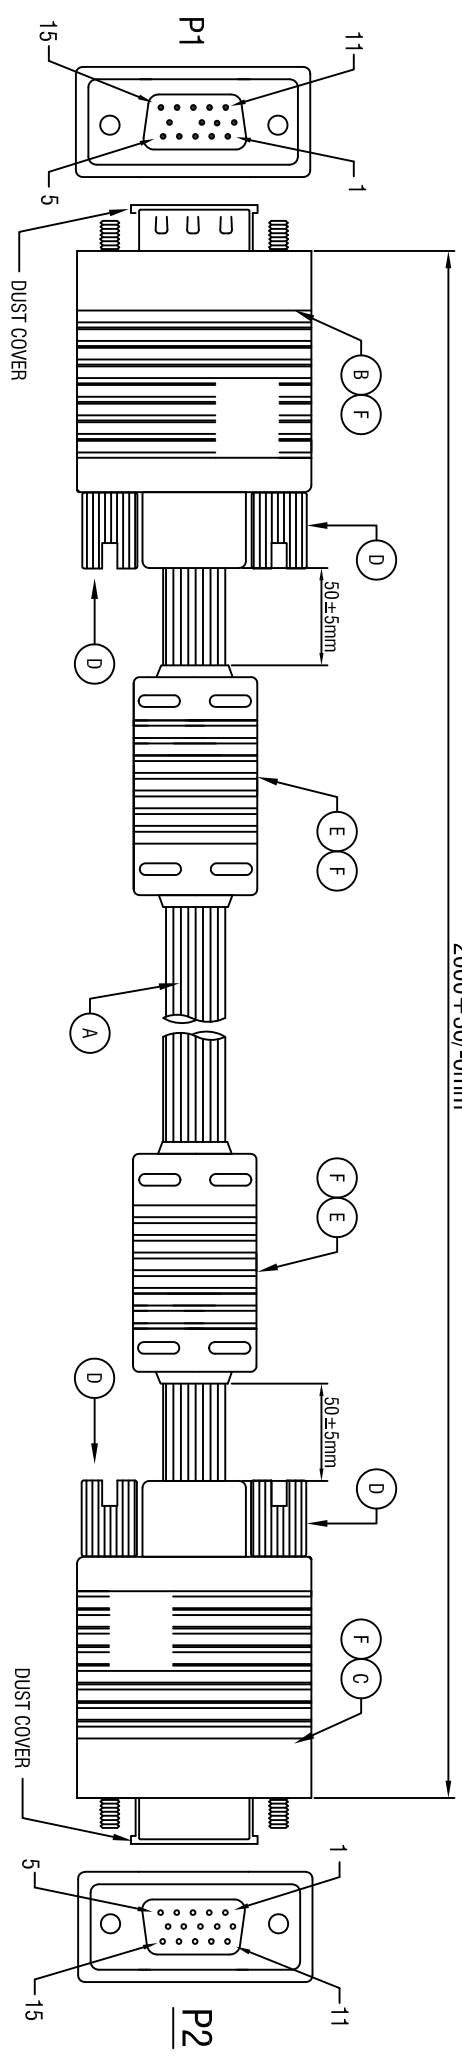

WIRE ADDRESS

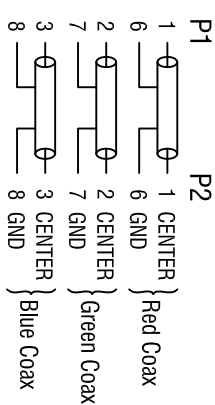

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

F	4SP BLACK PVC	55.6	G
E	Ferrite Core (17.5*28.5*9.5mm)	2	PCS
D	HD37.7 Screw	4	PCS
C	HDB15P FEMALE (PIN9 OUT, Black Insulator Nickel Plated)	1	PCS
B	HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)	1	PCS
A	UL2919,28# 3G0AX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	PCS
NUMBER		Quantity	Unit
1		2	4
PRODUCT SPECIFICATIONS			

ROLINE HQ VGA Cable with Ferrite, HD15 M - HD15 F, 2.0m	
Item	11.04.5352
Draw	<i>Make</i> Date: 2020.05.13
Approval	
Duty	F16 BOM.NO.:13920
Sample NO.	

