


RoHS Compliant

2000 + 30/-0mm

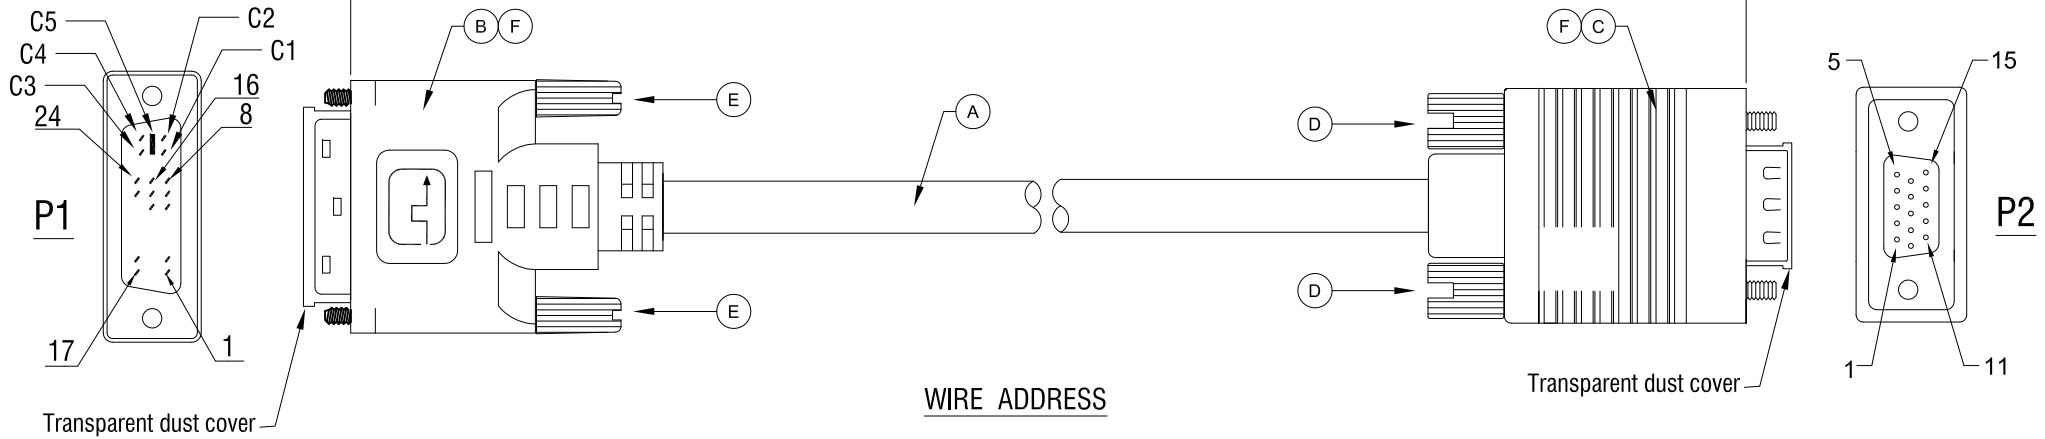

**WIRE ADDRESS**

P1	P2	
C1	1	CENTER } Red Coax
C5	6	GND }
C2	2	CENTER } Green Coax
C5	7	GND }
C3	3	CENTER } Blue Coax
C5	8	GND }
14+16	9	
15	5+10	
7	12	
C4	13	
8	14	
6	15	
Shell	Shell	

**Electrical Test:**

- 100% TEST OPEN SHORT MIS-WIRE.
- CONTACT RESISTANCE: 3Ω MAX.
- INSULATION RESISTANCE: 5MΩ MIN.
- HI-POT: 300V DC/10MS.
- Real Test Passed 1920\*1080P 60Hz.
- Real Test Not Twinkling, Double Vision and Decolor.

NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity	Unit
F		45P BLACK PVC		G
E		Screw: #4-40 UNC 2.3*32mm BLACK	2	PCS
D		Screw: #4-40 UNC 2.3*37.5mm BLACK	2	PCS
C	1	Z-11.04.5420		
C		HDB 15P MALE(Black Insulator Nickel Plated)	1	PCS
B		DVI17P MALE(Black Insulator Nickel Plated)	1	PCS
A		UL2919 28#*3COAX+28#*7C+AEB,OD=8.0mm BLACK COLOR PVC JACKET	1	PCS

ROLINE DVI Cable, DVI (12+5) - HD15, M/M, 2 m		
Item	11.04.5420	
Draw	Andi	Date: 2014.05.22
Approval		
Duty	F16	BOM.NO:13498

