



5000+80/-0mm

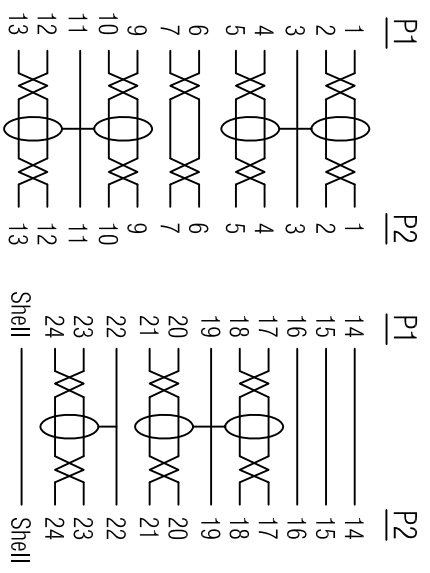

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:15Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 2560*1600P 60HZ
 - 6.Real Test Not Twinking, Double Vision and Decolor.

G	4SP PVC BLACK	G	
F	DVI SHELL (30P BLACK PVC)	PCS	2
E	DVI SPT	PCS	2
D	FERRITE(17.5*10.5*28.5mm)BLACK	PCS	2
C	Screw : #4-40UNC(Nickel Plated, BLACK MOLDING)	PCS	4
B	DVI24 + 1 MALE (Black Insulator, Nickel Plated)	PCS	2
A	UL2027(28#*1P(GCS)+DAM)*7C+28#*1P(BG)+28#*2C(BG)+26#*1C(BG)+ADB,OD=8.5, BLACK PVC JACKET	PCS	1
PRODUCT SPECIFICATIONS			
NUMBER	1	2	4
		Quantity	Unit
Sample NO.		Duty	F16
		BOM.NO.	13869
		Approval	
		Draw	Make
		Item	11.04.5555
		Date:	2020.03.09
		Shell	
		Shell	

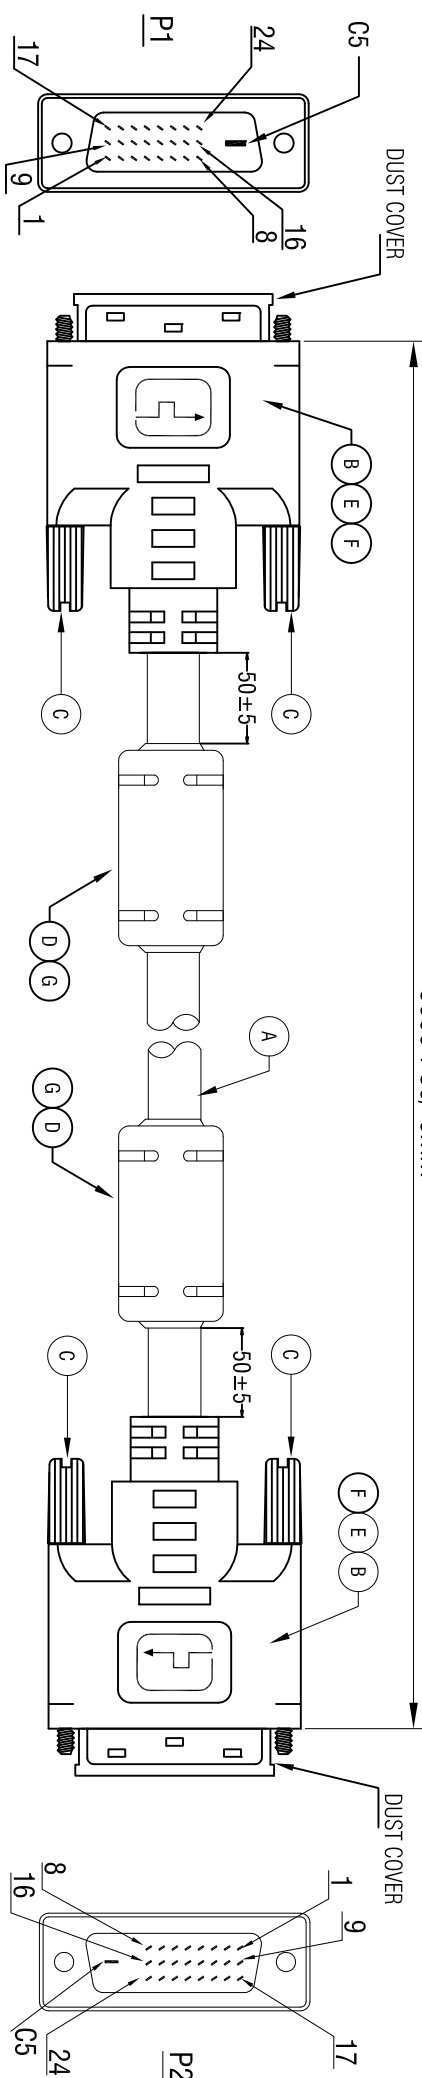