


**ELECTRICAL TEST:**

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2.5 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

**WIRE CONNECTION**

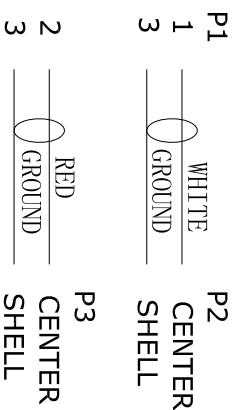

REV	ECN	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME
8			heat-shrinkable tubing ~ $\phi$ 2.0MM~BLACK~	0.01	pcs
7			TRANSPARENT PE ROHS LDPE	4	g
6		.X .XX .XXX	45P RED PVC ROHS 45P WHITE(N-BHC 2001) PVC ROHS 45P BLACK PVC ROHS	6 6 6	g g g
5			RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs
4			DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs
3			NO UL [7/0.127TC*IC+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	5	m
2			DESCRIPTION	Q'TY	UNIT
1					
NO					

REV	ECN	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME
		.X .XX .XXX	<b>SECCOMP</b> TITLE: ROLINE 3.5mm/ 2XRCA (M) Cable 5.0m		
			P/N :	11.09.4345	
			CHECK BY		
			APPD BY		
			SCALE	NONE	
			UNIT	MM	
			DATE	2019.10.22	
			DRAWING NO.:	CA1790169	
			REV.	AO	1/1