



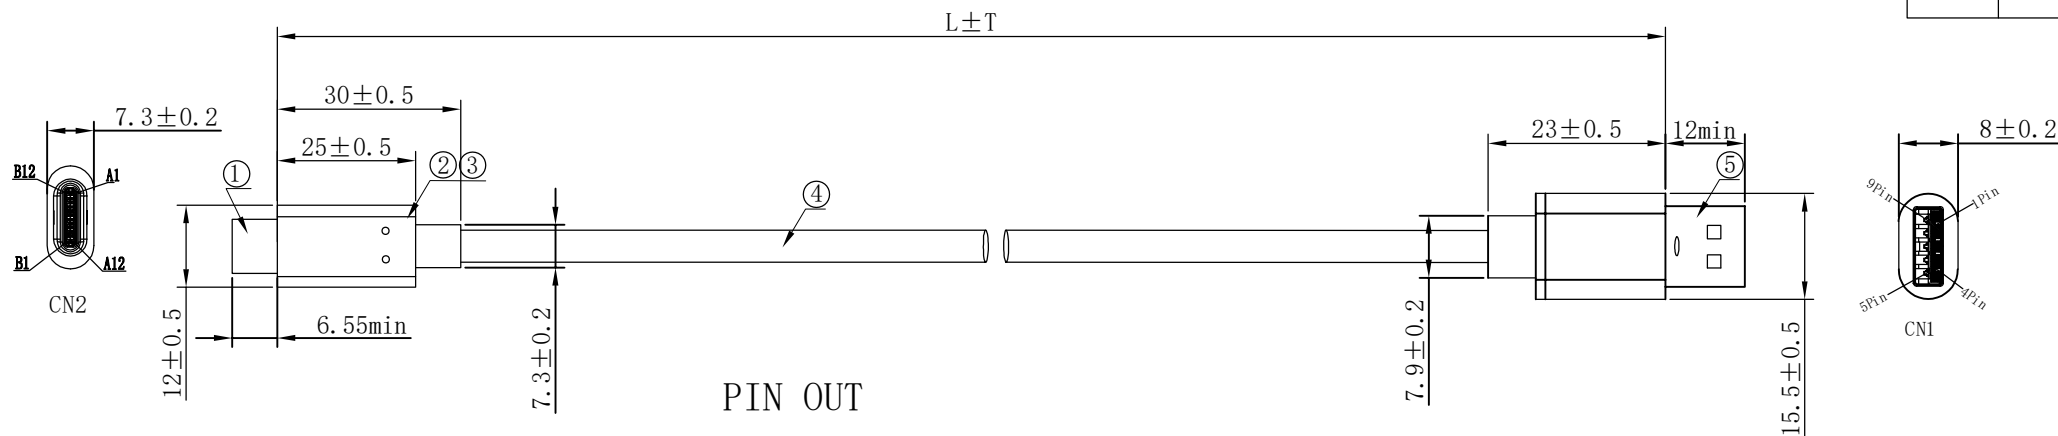

PIN OUT

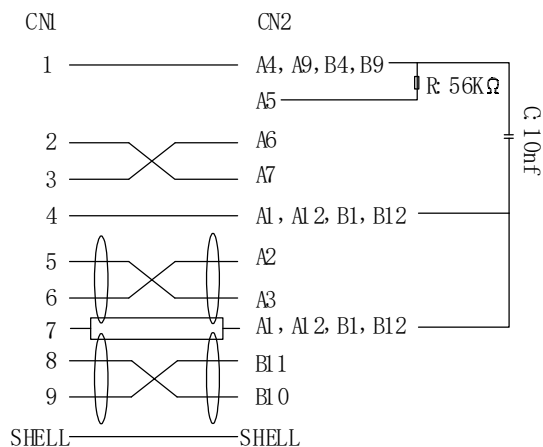

NOTE:

- Electrical test:
  - 100% open short & miss wire test;
  - Insulation resistance:  $10 \text{ M}\Omega$ ;
  - Open resistance:  $3 \Omega$
  - Dielectric strength: 300V DC
- RoHS and Reach Compliant
- PRINTING: SUPER SPEED USB 3.2 CABLE AWM 2725 80°C 30V VW-1 RECYCLED
- Current Rate: 3A max
- Data Transfer: 10Gbps
- The proportion for the recycled material is more than 50%.

MATERIAL LIST:

|     |                 |                                                                                                       |            |        |
|-----|-----------------|-------------------------------------------------------------------------------------------------------|------------|--------|
| ⑤   | USB TYPE A Male | USB TYPE A Male Type, The Pin Gold Plating, the shell for Nickel Plating                              | 1          |        |
| ④   | CABLE           | (30AWG*1P+D+AL+MY)*2C+30AWG*1P+22AWG*2C+ADB OD: $4.8 \pm 0.2 \text{ mm}$ Black/PVC RECYCLED           | 1          |        |
| ③   | OUTER MOLD      | RECYCLED PVC color For black                                                                          | 2          |        |
| ②   | INNER MOLD      | LD-PE                                                                                                 | 2          |        |
| ①   | USB TYPE C Male | USB TYPE C Male Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating | 1          |        |
| NO. | PARTS NAME      | SPECIFICATION STANDARD                                                                                | QT'Y       | REMARK |
|     |                 |                                                                                                       |            |        |
|     |                 | NEW                                                                                                   | 2025-12-12 | A      |
| BY  | CHK             | REVISION RECORD MODIFICATIONS                                                                         | DATE       | REV.   |

|            |                                           |            |
|------------|-------------------------------------------|------------|
| 11.45.9012 | ROLINE RM Cable USB3.2 Gen1, A-C, M/M, 2m | 2000±30    |
| ITEM NO.   | DESC.                                     | LENGTH(mm) |

SECOMP