



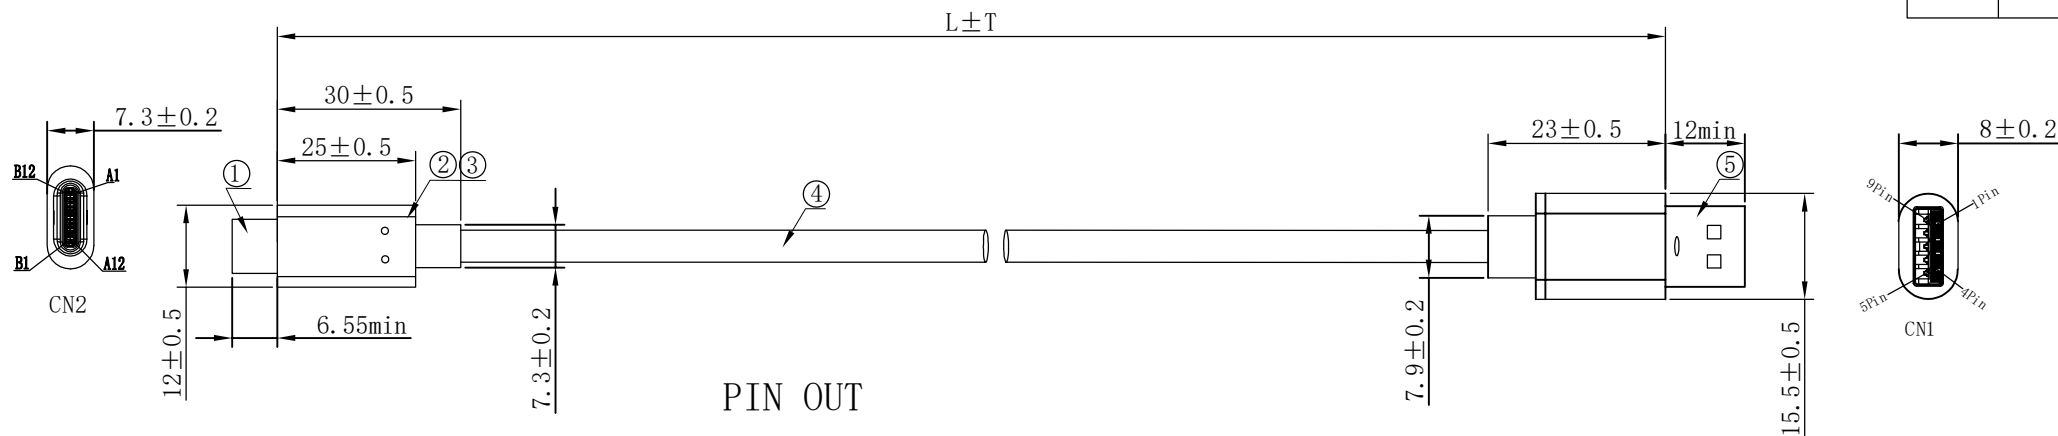

PIN OUT

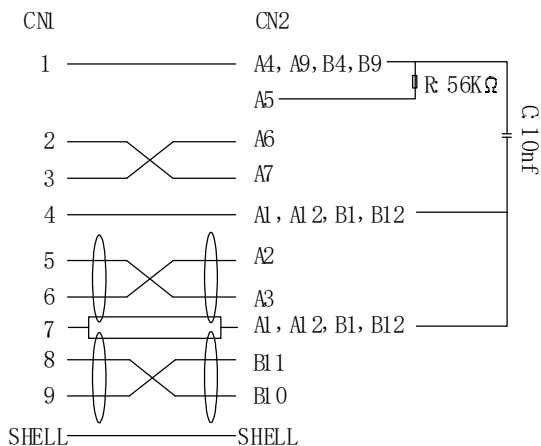

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: $10M\Omega$;
 - Open resistance: 3Ω
 - Dielectric strength: 300V DC
- RoHS and Reach Compliant
- PRINTING: SUPER SPEED USB 3.2 CABLE AWM 2725 80°C 30V VW-1 RECYCLED
- Current Rate: 2A max
- Data Transfer: 5Gbps
- The proportion for the recycled material is more than 50%.

MATERIAL LIST:

⑤	USB TYPE A Male	USB TYPE A Male Type, The Pin Gold Plating, the shell for Nickel Plating	1	
④	CABLE	(30AWG*1P+D+AL+MY)*2C+30AWG*1P+22AWG*2C+ADB OD: 4.8 ± 0.2 MM Black/PVC RECYCLED	1	
③	OUTER MOLD	RECYCLED PVC color For black	2	
②	INNER MOLD	LD-PE	2	
①	USB TYPE C Male	USB TYPE C Male Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2025-12-12	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.9013	ROLINE RM Cable USB3.2 Gen1, A-C, M/M, 3m	3000±50
ITEM NO.	DESC.	LENGTH(mm)

SECOMP