



Datenblatt - Fiche technique - Data sheet

11.88.5646



ROLINE GOLD DisplayPort Kabel, DP ST - ST, 3,0m

ROLINE GOLD Câble DisplayPort DP M - DP M, 3,0m


ROLINE GOLD DisplayPort Cable, DP M - DP M, 3 m

ROHS-COMPLIANT

| LTR | REV | DESCRIPTION | DATE |
|-----|-----|-------------|------|
| | | | |

DISPLAYPORT MALE
INS:BLACK

DISPLAYPORT MALE
INS:BLACK

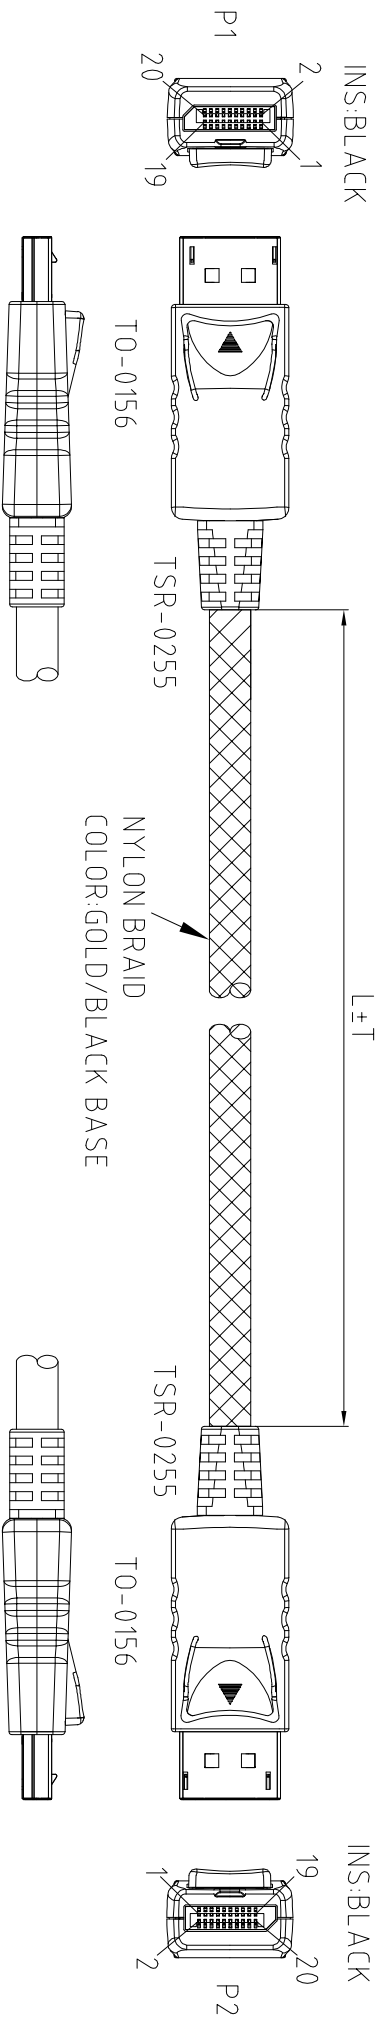

NOTE:

- CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY +Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY+ B.D(85%) PVC JACKET, OD:6.5±0.2mm COLOR:MATT BLACK(INK-K01).
- CONNECTOR:
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15U"
GOLD PLATED SHELL.
- SHIELD:INNER MOLD MUST BE WRAPPED COPPER TO CONNECTOR SHELL & CABLE BRAID
- HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR: GOLD
- ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max.
(3)INSULATION RESISTANCE 10M ohm Min.
- PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

| | | | | | |
|------------|---------------|-------|-------|------------------|------------|
| 200-1484-3 | 11.04.5647-5 | 5000 | 50 | 5 | 10 |
| 200-1484-2 | 11.04.5646-10 | 3000 | 30 | 10 | 20 |
| 200-1484-1 | 11.04.5645-10 | 2000 | 30 | 10 | 20 |
| DWG | P/N | L(mm) | T(mm) | PCS/INNER CARTON | PCS/CARTON |

| Tolerance | Inch | M/M |
|-----------|------|-----|
| X | .015 | .30 |
| XX | .010 | .10 |
| XXX | .005 | .05 |

Rotronic co., LTD.
Title
DISPLAYPORT ASS'Y CABLE

Draw
FANNIE 12/13/10'

Customer P/N

Check

App'd

Customer: T-RAG

Engr

Scale| NONE

Units| M/M
Third Angle Projection

Dwg No. 200-1484

REV: A

Sheet: 1/2

| LTR | REV | DESCRIPTION | DATE |
|-----|-----|-------------|------|
| | | | |

PIN OUT

| P1 | P2 | CABLE FUNCTION |
|-------|-------|-----------------|
| 1 | 12 | ML_Lane 0(p) |
| 3 | 10 | ML_Lane 0(n) |
| 2 | 11 | GND |
| 4 | 9 | ML_Lane 1(p) |
| 6 | 7 | ML_Lane 1(n) |
| 5 | 8 | GND |
| 7 | 6 | ML_Lane 2(p) |
| 9 | 4 | ML_Lane 2(n) |
| 8 | 5 | GND |
| 10 | 3 | ML_Lane 3(p) |
| 12 | 1 | ML_Lane 3(n) |
| 11 | 2 | GND |
| 15 | 15 | AUX CH(p) |
| 17 | 17 | AUX CH(n) |
| 16 | 16 | GND |
| 13 | 13 | CONFIG1 |
| 14 | 14 | CONFIG2 |
| 18 | 18 | Hot Plug Detect |
| 19 | 19 | Return DP_PWR |
| SHELL | SHELL | |

B.D

| | | | |
|--------------------|------------------|---------------------------|----------------------------------------------------|
| Tolerance Inch M/M | | Title | |
| X | .015 .30 | Rotronic co., LTD. | |
| XX | .010 .10 | DISPLAYPORT ASS'Y CABLE | |
| XXX | .005 .05 | Customer P/N | |
| Draw | FANNIE 12/13/10' | Customer: T-RAG | |
| Check | Engr | App'd | Scale NONE Units M/M Third Angle Projection |
| Dwg No. 200-1484 | | REV: A | Sheet: 2/2 |