



Pin Assignment:			
P1		P2	
(B4,B9,A4,A9)	VBus	VBus	
(A5)	CC	CC1	
(A7)	D-	D-	
(A6)	D+	D+	
(A1,A12,B1,B12)	GND	GND+GND	
	Shell	GND	
	(B5) VCONN		

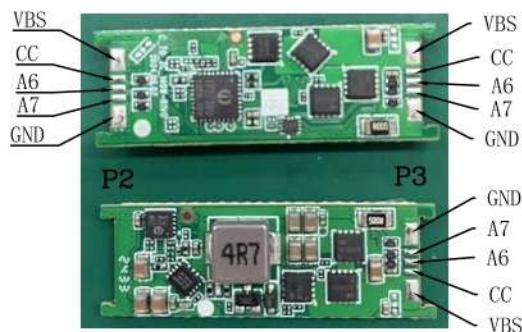

Pin Assignment:			
P3(C1)		P4	
VBus		VBus (B4,B9,A4,A9)	
CC		CC (A5)	
D-		D- (A7)	
D+		D+ (A6)	
GND	GND+GND	GND (A1,A12,B1,B12)	
		Shell	
		VCONN (B5)	RP 1K0

Pin Assignment:			
P3(C2)		P5	
VBus		VBus (B4,B9,A4,A9)	
CC		CC (A5)	
D-		D- (A7)	
D+		D+ (A6)	
GND	GND+GND	GND (A1,A12,B1,B12)	
		Shell	
		VCONN (B5)	RP 1K0



8	TYPE-C`WITH TIN SHIELDED	3	pcs		TOLERANCE					
7	USB2.0 C Type Connector PCB+PCB+Connector+1K RESISTANCE`METAL SHELL NICKEL PLATED	3	pcs		INCHES	M/M				
6	PVC`50P`CABLE CLIP`COLOR:BLACK	1	pcs		.X	.015		.30		
5	PC+ABS SHELL, Lower COVERS, COLOR:BLACK	1	pcs		.XX	.010		.10		
4	PC+ABS SHELL, THE UPPER, COLOR:BLACK	1	pcs	.XXX	.005	.05	Title: VALUE USB-C Splitter Charging Cable, 100W, 1.8m, Black			
3	PVC MOLDING SR COLOR:BLACK	22	g	DRAWN BY			P/N :		11.99.8312	
2	Type C TO 2C 100W`PCB+Connector	1	pcs	CHECK BY			SCALE	NONE	DRAWING NO.:	Rev. A0
1	22AWG (65/0.08TC+250DNylon)*1C+23AWG (52/0.08TC+250DNylon)*1C+30AWG (19/0.06TC+250DNylon)*2C+30AWG (19/0.06TC+250DNylon)*1C+2E+P`BLACK (PVC012-0001)	2.2	m	APPD BY			UNIT	MM		
NO	DESCRIPTION	Q'TY	UNIT				DATE	2025.03.19	H35181000000370	1/1