


Bild / Picture

Anwendung / Application

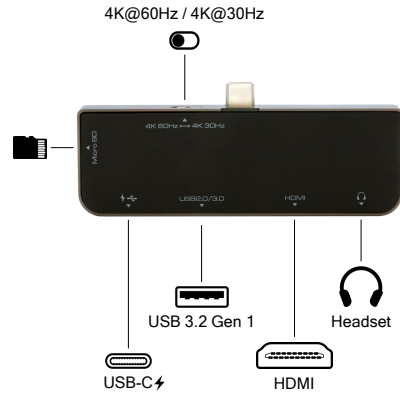

5-in-1 USB-C Mini Docking Station

5-in-1 USB-C Mini Docking Station

Beschreibung

Description

Die EX-1222HM ist eine kleine 5-in-1 USB-C Dockingstation, die direkt am Notebook oder Tablet angeschlossen wird und aufgrund der kompakten Masse dauerhaft im eingesteckt bleiben kann. Mit der EX-1222HM können an einem USB-C Port alle benötigten Peripheriegeräte angeschlossen werden. USB-C Power Delivery (PD) ermöglicht es, das Notebook oder Tablet direkt über die EX-1222HM mit dem vorhandenen USB-C Ladegerät aufzuladen.

The EX-1222HM is a small 5-in-1 USB-C docking station that connects directly to your notebook or tablet and can stay plugged in permanently due to its compact size. With the EX-1222HM, all the peripherals you need can be connected to one USB-C Port. USB-C Power Delivery (PD) allows the notebook or tablet to be charged directly via the EX-1222HM using the existing USB-C charger.

Merkmale

Features

<ul style="list-style-type: none"> • 5 in 1 Mini-Dockingstation 	<ul style="list-style-type: none"> • 5 in 1 mini docking station
<ul style="list-style-type: none"> • Langlebiges und elegantes Aluminiumdruckguss-Gehäuse 	<ul style="list-style-type: none"> • Durable and elegant aluminum alloy case
<ul style="list-style-type: none"> • Unterstützt USB-C PD Ladefunktion bis 87W 	<ul style="list-style-type: none"> • Supports USB-C PD charging up to 87W
<ul style="list-style-type: none"> • HDMI, USB 3.2 Gen 1, USB-C PD, 3.5 mm Audio in/out 	<ul style="list-style-type: none"> • HDMI, USB 3.2 Gen 1, USB-C PD, 3.5 mm Audio in/out
<ul style="list-style-type: none"> • Umschalter: HDMI 4K@60Hz / USB 2.0 HDMI 4K@30Hz / USB 3.2 Gen 1 	<ul style="list-style-type: none"> • Switcher: HDMI 4K@60Hz / USB 2.0 HDMI 4K@30Hz / USB 3.2 Gen 1
<ul style="list-style-type: none"> • Kartenleser für microSD/SDHC/SDXC 	<ul style="list-style-type: none"> • Card reader for microSD/SDHC/SDXC
<ul style="list-style-type: none"> • Für Notebooks/MacBooks/Tablets mit USB-C Anschluss (DP Alt Mode) 	<ul style="list-style-type: none"> • For Notebooks/MacBooks/Tablets with USB-C port (DP Alt Mode)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Datentransfer-Rate:	120M bps bis 5 Gbps	Data transfer rate:	120Mbps up to 5Gbps
Anschlüsse:	1x C-Stecker Upstream 1x C-Buchse Power (PD) 1x USB 3.2 Gen 1 A-Buchse 1x HDMI 4K@60Hz / 4K@30Hz 1x 3.5 mm Klinke Audio-Ausgang 1x micro SD-Slot	Connectors:	1x C-Male Upstream 1x C-Female Power (PD) 1x USB 3.2 Gen 1 A socket 1x HDMI 4K@60Hz / 4K@30Hz 1x 3.5 mm jack audio output 1x micro SD slot
Hardwaresysteme:	USB 3.2 Gen 1 / USB 2.0	Hardware system:	USB 3.2 Gen 1 / USB 2.0
Treiber:	Benötigt keine Treiber (Standard HUB)	Driver:	No driver necessary (Standard HUB)
Betriebssysteme:	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x	Operating systems:	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-20°C bis +85°C Celsius	Storage temperature:	-20°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+5V	Current Supply:	+5V
Abmessung:	90.00 x 37.00 x 10.00 mm	Size:	90.00 x 37.00 x 10.00 mm
Gewicht:	33 g	Weight:	33 g
EAN:	4718359012228	EAN:	4718359012228
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-1222HM, Handbuch	Packaging contents:	EX-1222HM, Manual

Bilder / Picture

