


Skizze / Bild

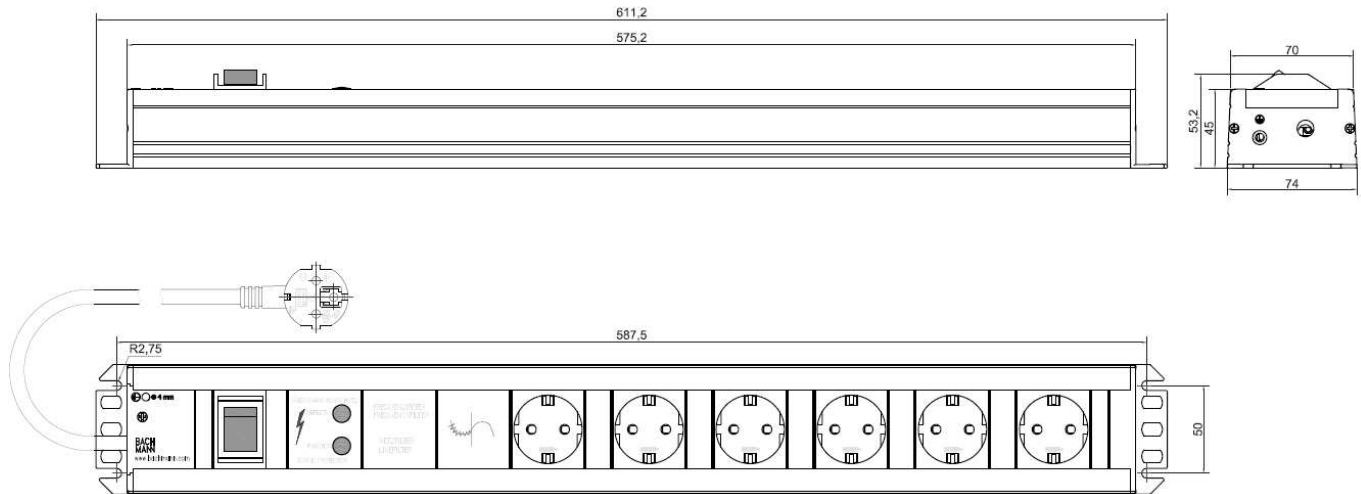

<p>Handwerkerleiste 6-fach Schutzkontakt mit Überspannungsschutz, Filter und Schalter</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> • 6x Schutzkontakt • 16A, AC 250V, 3600W • Mit Überspannungsschutz mit Filter 6,5kA <p>Anschluss:</p> <ul style="list-style-type: none"> • 2,0m H05VV-F3G1,5mm², schwarz • Schutzkontaktstecker mit doppeltem Erdungssystem <p>Profil:</p> <ul style="list-style-type: none"> • PVC, RAL 7035, Glühdrahtfest bis 850°C <p>Kunststoff:</p> <ul style="list-style-type: none"> • PA 6 GF 30, schwarz <p>Endkappen:</p> <ul style="list-style-type: none"> • Geschraubt • Mit Euroklemme • Wiederanschließbar über öffnbare Abdeckung • Ausgang für separaten Erdleiter <p>Abmessungen (Länge x Breite x Höhe) in mm:</p> <ul style="list-style-type: none"> • Siehe Zeichnung <p>Lieferform:</p> <ul style="list-style-type: none"> • Im Polybeutel verpackt mit Header <p>Lieferumfang:</p> <ul style="list-style-type: none"> • 1x Handwerkerleiste • 1x Anleitung 	<p>Craftsman socket outlet 6-way German type outlet with OVP, filter and switch</p> <p>Sockets:</p> <ul style="list-style-type: none"> • 6x German type socket outlet • 16A, AC 250V, 3600W • With overvoltage protection with filter 6,5kA <p>Connection:</p> <ul style="list-style-type: none"> • 2,0m H05VV-F3G1,5mm², black • German type plug with double earthing <p>Profile:</p> <ul style="list-style-type: none"> • PVC, RAL 7035, glow wire resistant up to 850°C <p>Plastic material:</p> <ul style="list-style-type: none"> • PA 6 GF 30, black <p>Endcaps:</p> <ul style="list-style-type: none"> • Screwed • With euro terminal • Rewireable via openable clap • Output for additional, external earth conductor <p>Measurements (length x width x height)</p> <ul style="list-style-type: none"> • See drawing <p>Packing:</p> <ul style="list-style-type: none"> • In poly bag with header <p>Extent of delivery:</p> <ul style="list-style-type: none"> • 1x CSO • 1x Instruction manual
--	---