



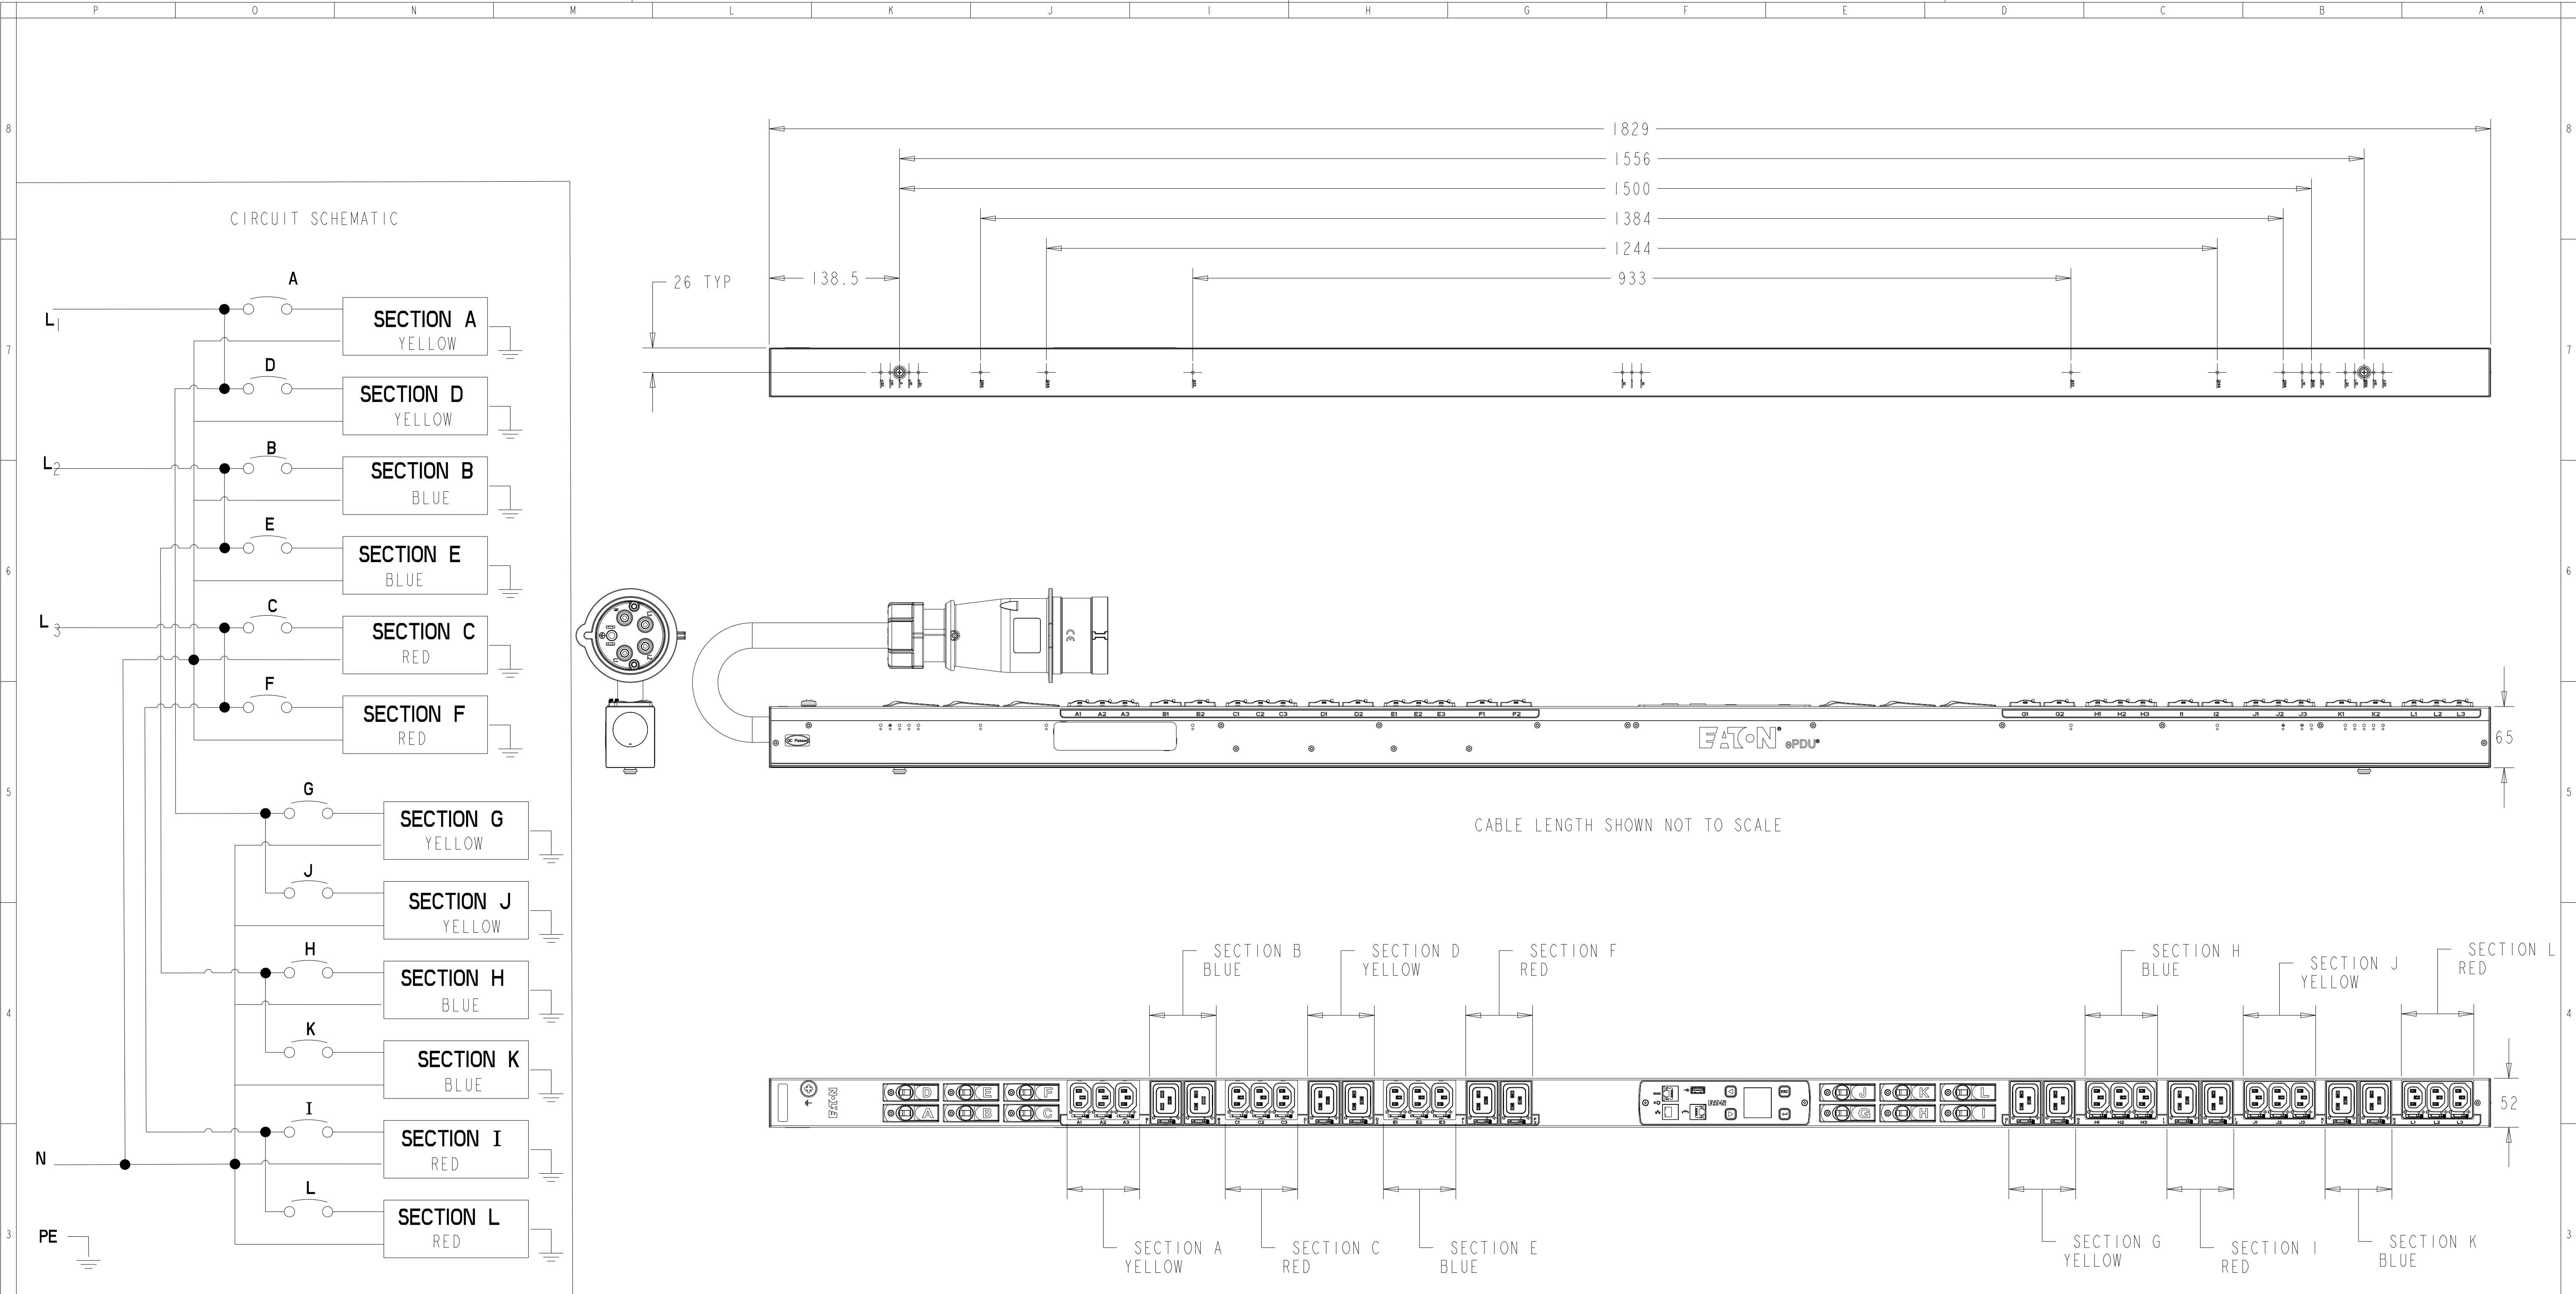

EMIB352		G3 METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309-2 63A 400V~ WYE, 3W+N+PE 16.0mm ² HO7 POWER CORD CABLE LENGTH: 3.0m	(18) IEC 60320 C13 GRIP/P-LOCK (12) IEC 60320 C19 GRIP/P-LOCK ALTERNATING SECTIONS	0 TO 60°C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1829 mm WIDTH: 52 mm DEPTH: 65 mm ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	200-240/346-415V~ 3W+N+PE 50/60Hz 63A	200-240V~; 50/60Hz 10A PER C13; 16A PER C19 16A MAX PER SECTION 63A MAX TOTAL	CE
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(12) 16A 1-POLE	NONE	STANDARD KSP025 - VERT INSTALLATION AND NETWORK PACK KA35 OPTIONAL EMPDTHIC2 - ENVIRONMENTAL PROBE	EM16DW8FBJ28BAM

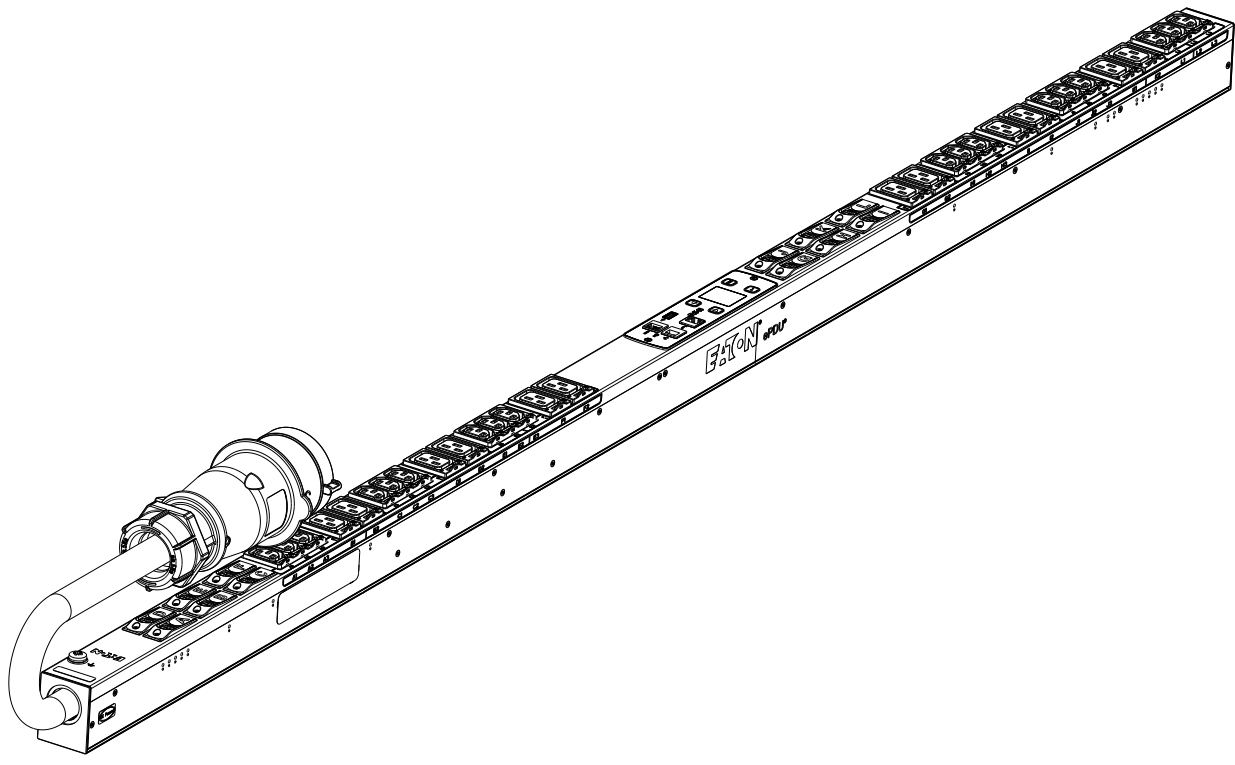

REV. / MODIFICATION	DATE	DESS/DRAW	VERIF.
HEINEMANN PRODUCTS			
CH-1345 LE LIEU SWITZERLAND			
VUE/VIEW 1ST ANGLE	ECHELLE / SCALE 3/10	N° MAG	EMIB352
DESSINE LE / DRAWN THE	PAR / BY	VERIFIE PAR / VERIFIED BY	ENOVIA
TOLERANCE GENERALE / GENERAL TOLERANCE ±0.1	±0.5*	N/A	
TRAITEMENT / FINISH N/A	N/A		
MATIERE / MATERIAL N/A	N/A		
NIVEAU DU CERTIFICAT DE SOUMISSION REDUIS / SAMPLES APPROVAL PROCESS REPORT N/A	DIMENSIONS AND TOLERANCES IN MILLIMETERS		
DESIGNATION EPDU MI 0U (309 63A 3P)18XC13:12XC19	SK-203319-Y1	00	
COTES A CONTROLER INSPECTION DIMENSIONS XX.XX	COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS # XX.XX	NUMERO DU PLAN PLAN NUMBER	REV.
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.			