


## 8 Port Gigabit Ethernet Switch

### Quick Installation Guide

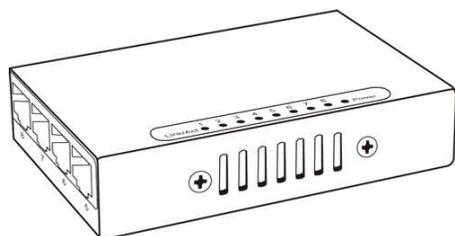

### Introduction

This switch provides 8 10/100/1000M ports. It was designed for easy installation and high performance in an environment where traffic is on the network and the number of users increases continuously.

The small compact palm size was specifically designed for small to medium workgroups. It can be installed where space is limited; moreover, it provides smooth network migration and easy upgrade to network capacity.

### Key Features

- 8 Port 10/100/1000M Switch
- Palm size with metal case
- Auto-learn of networking configurations
- Auto-detect full/half-duplex modes for any port
- Dedicated full-duplex 2000Mbps bandwidth
- Store-and-Forward switching methods
- IEEE 802.3x flow control for full-duplex and back-pressure flow control for half-duplex
- Non-blocking & Non-head-of-line blocking full wire speed forwarding
- Auto-MDI/MDI-X function for any port
- Smart plug & play

### Power

Power is supplied through an external DC power adapter.

### Front Panel (LEDs)


#### LED Indicators of 8 Port 10/100/1000M Switch

LED	Status	Operation
Power	On	Power is on.
	Off	Power is off.
LINK/ACT	On	Port is for connection
	Off	No connection.
	Flashing	Data is transmitting or receiving.

### Package Contents

Before you start to install this switch, please verify your package that contains the following items:

- One Gigabit Ethernet Switch
- One Power Adapter
- One Quick Installation Guide

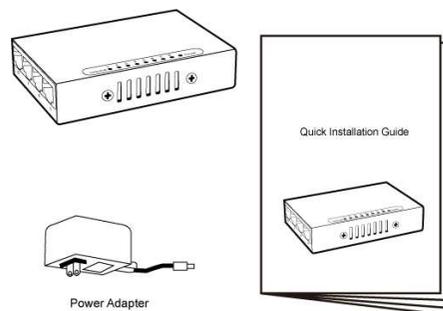

### Technical Specifications

<b>Standards</b>	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3x Flow control
<b>Features</b>	Number of Ports: 8 MAC Address: 8K Buffer Memory: 1.5Mb Jumbo Frames: 9KB Transmission Method: Store and Forward
<b>Filtering/Forwarding Rates</b>	1000Mbps port – 1,488,000pps 100Mbps port – 148,800pps 10Mbps – 14,880pps
<b>Transmission Media</b>	10BaseT Cat. 3, 4, 5 UTP/STP 100BaseTX Cat. 5 UTP/STP 1000BaseT Cat. 5E UTP/STP
<b>LED Indicators</b>	Power, Link/ACT
<b>Power Supply</b>	DC 5V/1.2A
<b>Power Consumption</b>	4 Watts (Max)
<b>Dimensions</b>	21 x 94 x 62 mm
<b>Operating Temperature</b>	0 to 50 °C
<b>Storage Temperature</b>	-20 to 80 °C
<b>Humidity</b>	Max. 90% RH (non-condensing)

Note: If any of these items is found missing or damaged, please contact your local supplier for replacement.