




Product Specification

SuperPod WiFi 5

Product code: 900-2052

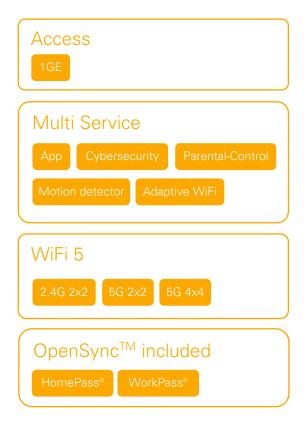





WiFi-Interfaces

Tri-band, tri-concurrent radio operation



5 GHz, upper:

5 GHz, lower:

2.4 GHz:

4x4 MIMO 802.11ax, 20/40/80 MHz 2x2 MIMO 802.11ax, 20/40/80 MHz 2x2 MIMO 802.11ax, 20/40 MHz



Ethernet Interfaces

- 1 port 1 GE for WAN or LAN
- 1 port 1 GE for LAN



IoT-Radio

Bluetooth Low Energy



Power

Power Supply100 to 240VAC, 50/60Hz

Plug Type: Swiss Plug

Power Consumption:
 4.5W Standby, 10W Average, 15W Maximum



Environment

Home SSIDs:

Operating Temperature: 0°C to 40°C
Operating Relative Humidity: 10% to 90%

Storage Conditions:
 -20°C to 70° C 10% to 90% (Relative Humidity)



Networking and Connectivity

Networking Modes: Auto-sensing Router or Bridge mode

Firewall and Networking:
 NAT, DHCP server, UPnP, client IP reservation, port

Managed with HomePass® or WorkPass®

forwarding

Guest Access: Managed with HomePass® or WorkPass®

Authentication/Encryption: WPA2-PSK







Packaging Content

- High-end single package with 1 SuperPod WiFi 5
- Ethernet cable




Size and Weight


Size:

• Weight:

96mm W x 87mm H x 36mm D (not including plug) 232g







87mm



Interface



