
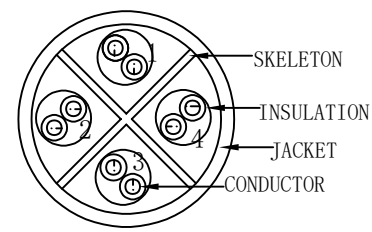


WIRING DIAGRAM

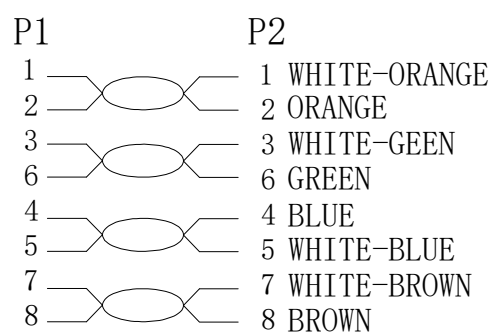

NOTE:
 1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
 2. FLUKE Channel LINK TEST:
 TEST LIMIT:ISO11801 Channel Class E(+ALL)
 3. Working temperature:-10°C~+60°C
 Storage temperature:-20°C~+75°C
 4. RoHS AND REACH compliant
 5. Spray WORD:CAT6 U/UTP 4x2x24AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568.2-D
 6. Support IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt (TYPE 3 & TYPE 4)
 7. Minimum of the bending radius is 6*ODmm(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	75A PVC Gray(RAL 7035)	2	
②	CONNECTOR	RJ45 8P8C UNSHIELDED, PIN GOLD PLATED 50u" COLOUR: TRANSPARENT	2	
①	CABLE	CAT.6 U/UTP 24AWG(BC*1P)*4P+FILLERS JACKET:PVC Gray(RAL 7035) OD:5.8±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

21.51.1510	ROLINE UTP PatchCord Cat.6/Class E, grey, 0.3m	300±20
21.51.0930	ROLINE UTP PatchCord Cat.6/Class E, grey, 0.5m	500±20
21.51.0931	ROLINE UTP PatchCord Cat.6/Class E, grey, 1m	1000±20
21.51.0923	ROLINE UTP PatchCord Cat.6/Class E, grey, 1.5m	1500±30
21.51.0932	ROLINE UTP PatchCord Cat.6/Class E, grey, 2m	2000±30
21.51.0933	ROLINE UTP PatchCord Cat.6/Class E, grey, 3m	3000±50
21.51.0935	ROLINE UTP PatchCord Cat.6/Class E, grey, 5m	5000±100
21.51.0937	ROLINE UTP PatchCord Cat.6/Class E, grey, 7m	7000±200
21.51.0940	ROLINE UTP PatchCord Cat.6/Class E, grey, 10m	10000±200
21.51.0945	ROLINE UTP PatchCord Cat.6/Class E, grey, 15m	15000±300
21.51.0950	ROLINE UTP PatchCord Cat.6/Class E, grey, 20m	20000±300
ITEM NO.	DESC.	LENGTH

ARVIN		NEW	2025-10-16	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

