



WIRING DIAGRAM

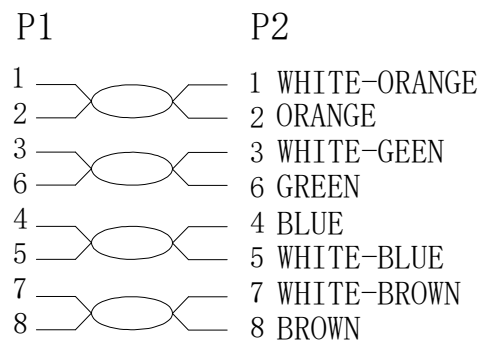

- NOTE:
1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
 2. FLUKE Channel LINK TEST:
TEST LIMIT:ISO11801 Channel Class E(+ALL)
 3. Working temperature:-10°C~+60°C
Storage temperature:-20°C~+75°C
 4. RoHS AND REACH compliant
 5. Spray WORD:CAT6 U/UTP 4x2x24AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568.2-D
 6. Support IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt (TYPE 3 & TYPE 4)
 7. Minimum of the bending radius is 6*ODmm(Suitable for all meters)

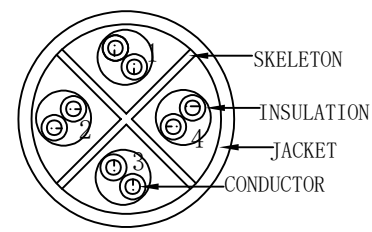

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
③	OVER MOLD	75A PVC Blue(Pantone 7462C)	2	
②	CONNECTOR	RJ45 8P8C UNSHIELDED, PIN GOLD PLATED 50u" COLOUR: TRANSPARENT	2	
①	CABLE	CAT. 6 U/UTP 24AWG(BC*1P)*4P+FILLERS JACKET:PVC Blue(Pantone 7462C) OD:5.8±0.2mm	1	
	ARVIN	NEW	2025-10-16	A
	BY	CHK	REVISION RECORD MODIFICATIONS	DATE
				REV.

ITEM NO.	DESC.	LENGTH
21. 51. 1514	ROLINE UTP PatchCord Cat. 6/Class E, blue, 0. 3m	300±20
21. 51. 1524	ROLINE UTP PatchCord Cat. 6/Class E, blue, 0. 5m	500±20
21. 51. 1534	ROLINE UTP PatchCord Cat. 6/Class E, blue, 1m	1000±20
21. 51. 0927	ROLINE UTP PatchCord Cat. 6/Class E, blue, 1. 5m	1500±30
21. 51. 1544	ROLINE UTP PatchCord Cat. 6/Class E, blue, 2m	2000±30
21. 51. 1554	ROLINE UTP PatchCord Cat. 6/Class E, blue, 3m	3000±50
21. 51. 1564	ROLINE UTP PatchCord Cat. 6/Class E, blue, 5m	5000±100

