



WIRING DIAGRAM



SHELL — BRAID — SHELL

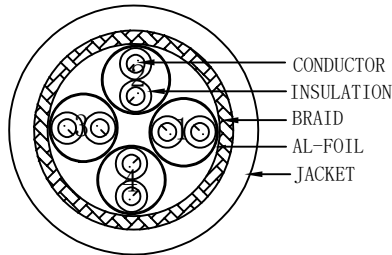

NOTE:

1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
  2. FLUKE Channel LINK TEST:TEST LIMIT:ISO11801 Channel Class EA
  3. Working temperature:-40°C~+60°C
  4. Storage temperature:-40°C~+75°C
  5. Operation humidity:10%~85%
  6. Storage humidity:10%~85%
  7. RoHS2.0 AND REACH compliant
  8. SPRAY WORD:CAT.6A S/FTP TPE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568.2-D
  9. Halogen-free (IEC 60754-2)
  10. Low smoke(IEC 61034)
  11. Flame retardant (IEC 60332-1-2)
  12. UV resistant (IEC 50289-4-17)
- Attention: Not suitable for underground installation;  
RJ-45 connections must be protected from the weather.

MATERIAL LIST

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated 3u", Transparent BLUE	2	
①	CABLE	S/FTP CAT.6A (1/26AWGBC*1P+AL-FOIL)*4PAIRS+ JACKET:TPE OD:6.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		Change the Working and Storage temperature		2024-08-29
		NEW		2023-02-01
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

Color:Black 3C	
ITEM NO.	LENGTH
21.99.0720	20000±300mm
21.99.0721	30000±400mm
21.99.0722	50000±400mm

DESC.	VALUE Outdoor S/FTP PatchCord Cat.6A/Class EA, Solid
-------	--

**SECOMP**