
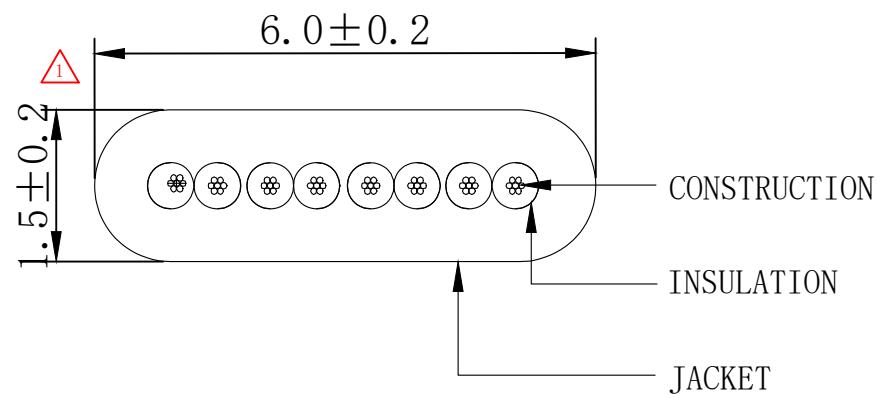


WIRING DIAGRAM



NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/UTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568.2-D
4. ROHS AND REACH COMPLIANT
5. Minimum of the bending radius is 6mm (Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	PVC Colour Black (Pantone 3C)	2	
②	CONNECTOR	RJ45 8P8C Unshielded Plug, Pin Gold Plated 3U", Transparent blue	2	
①	CABLE	(32AWG BC*1P)*4 JACKET: PVC OD: 1.5 ± 0.2 * 6.0 ± 0.2 mm black (Pantone 3C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH
21.99.0820	500 ± 30 mm
21.99.0821	1000 ± 30 mm
21.99.0824	1500 ± 50 mm
21.99.0822	2000 ± 50 mm
21.99.0823	3000 ± 70 mm
21.99.0825	5000 ± 70 mm

Gao	Arvin	Add dimensioning for the cable	2026-01-14	A1	
		NEW	2018-02-22	A	
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.	

DESC. VALUE Cat.6A UTP Flat Patch Cord, black

