


WIRING DIAGRAM(568B)

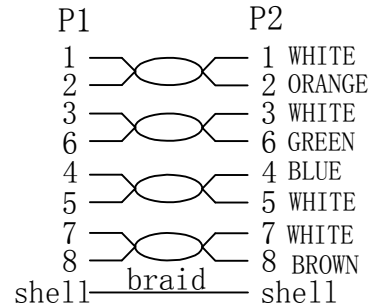

NOTE:

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT, MISS WIRE TEST
- (2). INSULATION RESISTANCE:DC 300V 10MΩ ;
- (3). CONDUCTOR RESISTANCE:3Ω Max (More than 3m, add one ohm per meter) ;

2. Fluke channel link test:

TEST LIMIT:ISO11801 Channel Class Ea

3. PRINT WORD:

CAT6A S/FTP 4x2x27AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2

4. ROHS2.0 & REACH COMPLIANT

5. Minimum of the bending radius is 50mm

(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	PVC 75A RED(PANTONE 199C)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3u", Shell Nickel Plating, Transparence blue	2	
①	CABLE	S/FTP CAT. 6A 27AWG (Bare Copper*IP+AL-FOIL)*4PAIRS+BRAID (AL-MG) COLOUR:RED/199C JACKET:LSZH OD:6.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW		2018-11-21 A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

COLOUR: RED (PANTONE 199C)		
ITEM NO.	LENGTH	TOLERANCE
21.99.1924	0.3m	±10mm
21.99.1920	0.5m	±15mm
21.99.1921	1m	±30mm
21.99.1991	1.5m	±45mm
21.99.1922	2m	±60mm
21.99.1923	3m	±90mm
21.99.1925	5m	±150mm
21.99.1926	7m	±210mm
21.99.1927	10m	±300mm
21.99.1928	15m	±450mm
21.99.1929	20m	±600mm

ITEM NO.	21.99.1924	21.99.1920	21.99.1921	21.99.1991	21.99.1922
	21.99.1923	21.99.1925	21.99.1926	21.99.1927	21.99.1928
	21.99.1929				
DESC.	VALUE S/FTP CAT. 6a Patch Cord, red				

SECOMP