


## 69004-090 DOUBLE TEST SOCKET, Ø 2 MM, LONG TYPE FOR MOUNTING PLANE 2

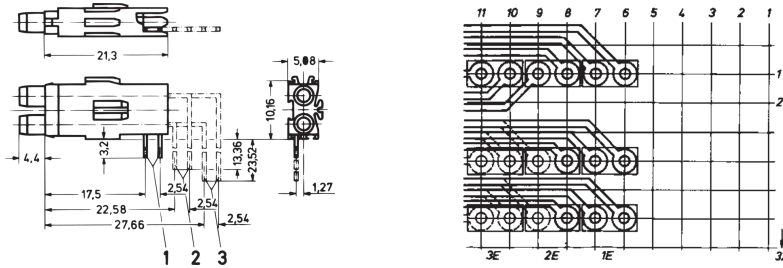

### KEY FEATURES

Double test sockets for Front Element System

### PRODUCT ATTRIBUTES

Product Type: Socket

Type: Long, Mounting Plane 2

Diameter: 2 mm

Voltage AC: 30 V

Max Current: 1 A

Test Voltage @ 50 Hz: 1 kV

Ambient Temperature: -25 to 70 °C

Solder Temperature: 260 °C

Flammability Rating: UL® 94V-0

Package Quantity: 10

### ADDITIONAL PRODUCT DETAILS

Double test sockets for mounting plane 1 and 2, short and long type.

Solder temperature should only be applied for a maximum of 5 seconds. The plastic body should be protected from the solder wave when wave soldering.

Dimensions of connecting pins: 0.3 × 0.6-mm.

Required front panel drill hole: Ø4-mm.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

## CERTIFICATIONS

---



### North America

All locations  
+1.763.422.2661  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Europe

Straubenhardt, Germany  
+49.7082.794.0  
Betschdorf, France  
+33.3.88.90.64.90  
Warsaw, Poland  
+48.22.209.98.35  
Assago, Italy  
+39.02.932.7141  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Asia

Shanghai, China  
+86.21.2412.6943  
Qingdao, China  
+86.532.8771.6101  
Singapore  
+65.6768.5800  
Shin-Yokohama, Japan  
+81.45.476.0271  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Middle East & India

Dubai, United Arab Emirates  
+971.4.378.1700  
Bangalore, India  
+91.80.6715.2001  
Istanbul, Turkey  
+90.216.250.7374  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)



Our powerful portfolio of brands:  
[nVent.com](https://nVent.com) **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.