



Datenblatt - Fiche technique - Data sheet

26.99.0362





VALUE Kat. 6 / Class E 19"-Patchpanel, 24P, ungeschirmt, schwarz

VALUE Panneau de brassage non blindé 19" Cat.6 / classe E noir

VALUE Cat.6/Class E 19" Patch Panel, 24 Ports, UTP, black

Item no. 26.99.0355 VALUE Cat. 6 19" Patch Panel, 24P, UTP, grey
 Item No. 26.99.0362 VALUE Cat. 6 19" Patch Panel, 24P, UTP, black

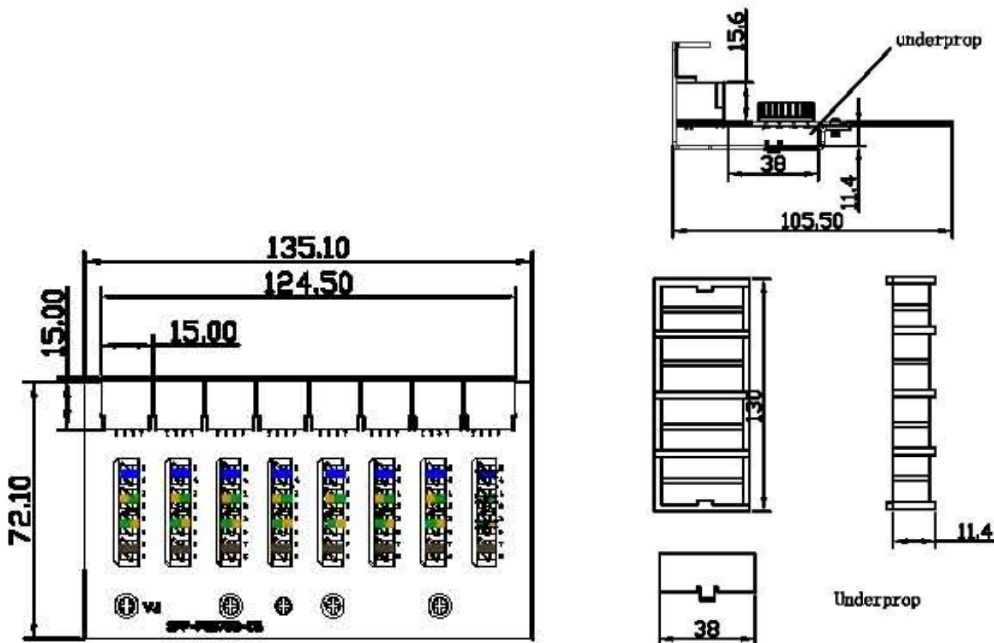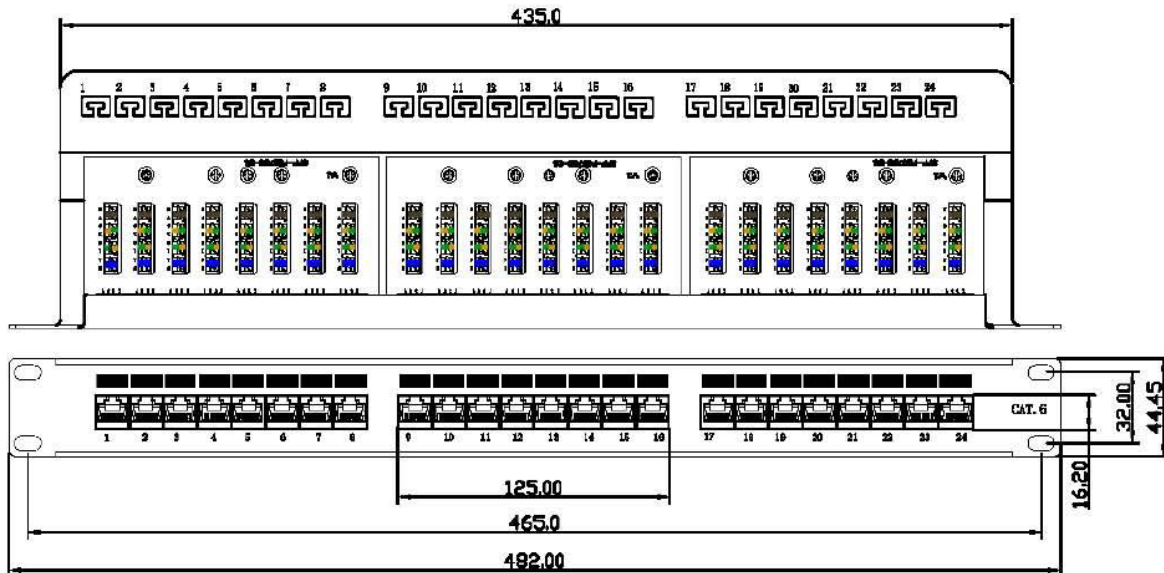

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125V AC RMS
2. CURRENT RATING : 1.5A mp
3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
6. CAT.6 PERMANENT LINK : ISO 11801 PL Max ClassE

ENVIRONMENTAL:

1. STORAGE : -40° TO+85°
2. OPERATION : 0° TO+70°

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

1. HOUSING MATERIAL PBT+15%GF UL94V0
2. PANEL FRAME S45C. POWDER COATING IN COLOUR
3. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
4. RJ45 JACK LIFE: 750 TIMES MIN
5. IDN LIFE : 200 TIMES MIN
6. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

Accessory:

1. Cable Tie(190×5.0mm) ×24Pcs (140×3.0mm) ×4Pcs
2. Instruction Sheet
3. Screw and Nut M6*18mm x 4set

RoHS & REACH Compliant

Packing:1PCS/PE BAG+user guide +panel box+lable

Material List:

⑦	Underprop	ABS 130*38*11.4mm	3	
⑥	Bottom Panel	1.2mm thickness Metallic Panel(SECC) Colour:see the chart	1	
⑤	RJ45 Jack	Housing-Fireproof PBT UL-94V0 BLACK Pin-8P8C 3u" gold plated	24	
④	PCB	1.6mm UL-94V0	3	
③	IDC Body	Fireproof PC/ABS UL-94V0 With Colour Coded Printing T568A/B	24	
②	IDC Pin	Phosphor Bronze & Tinned	192	
①	IDC Terminal	For 22-24AWG Cable	24	
NO.			QT' Y	REMARK