

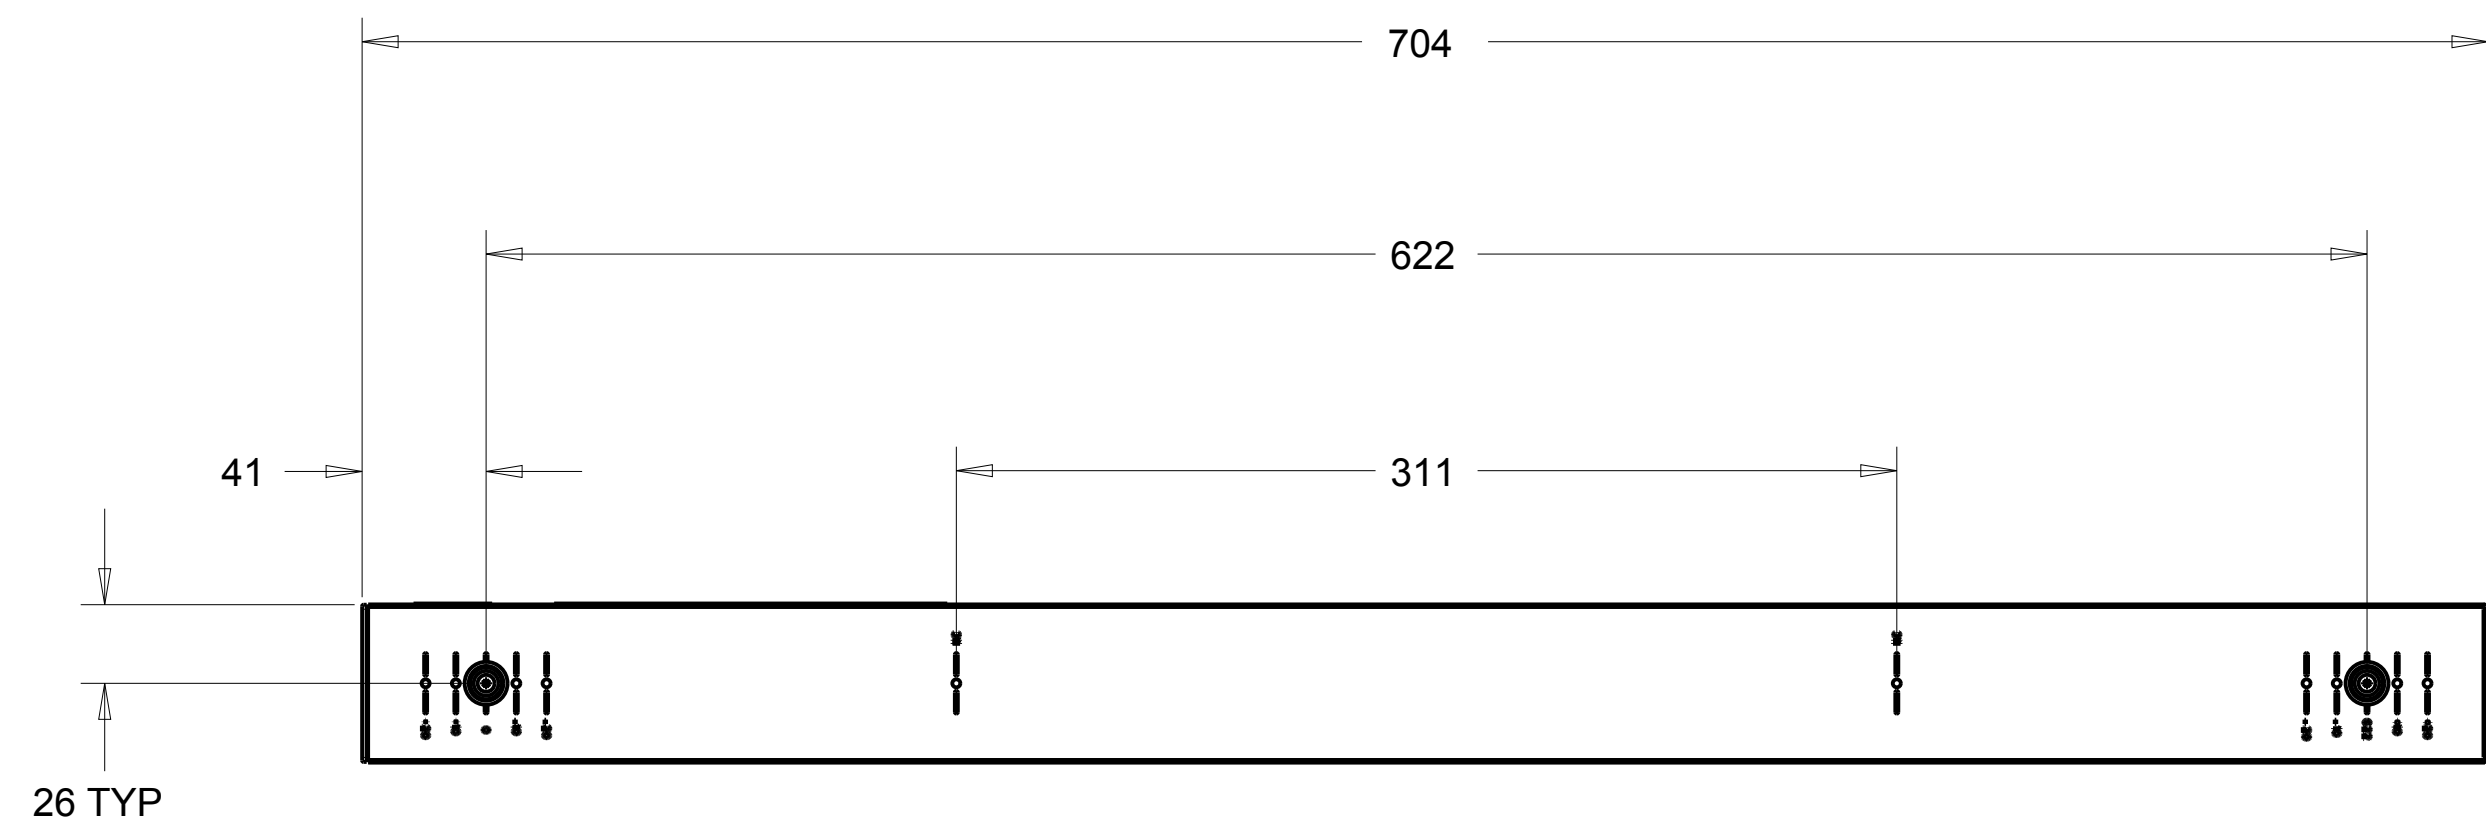
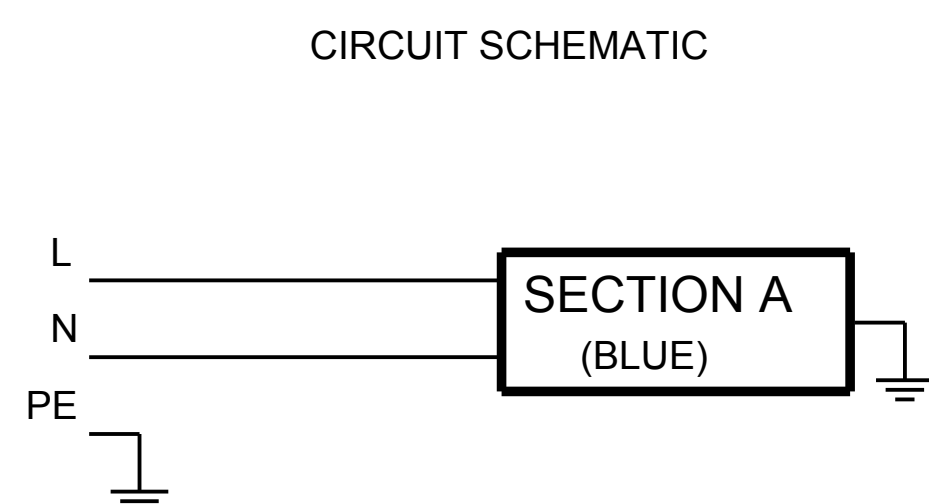


CABLE LENGTH SHOWN NOT TO SCALE

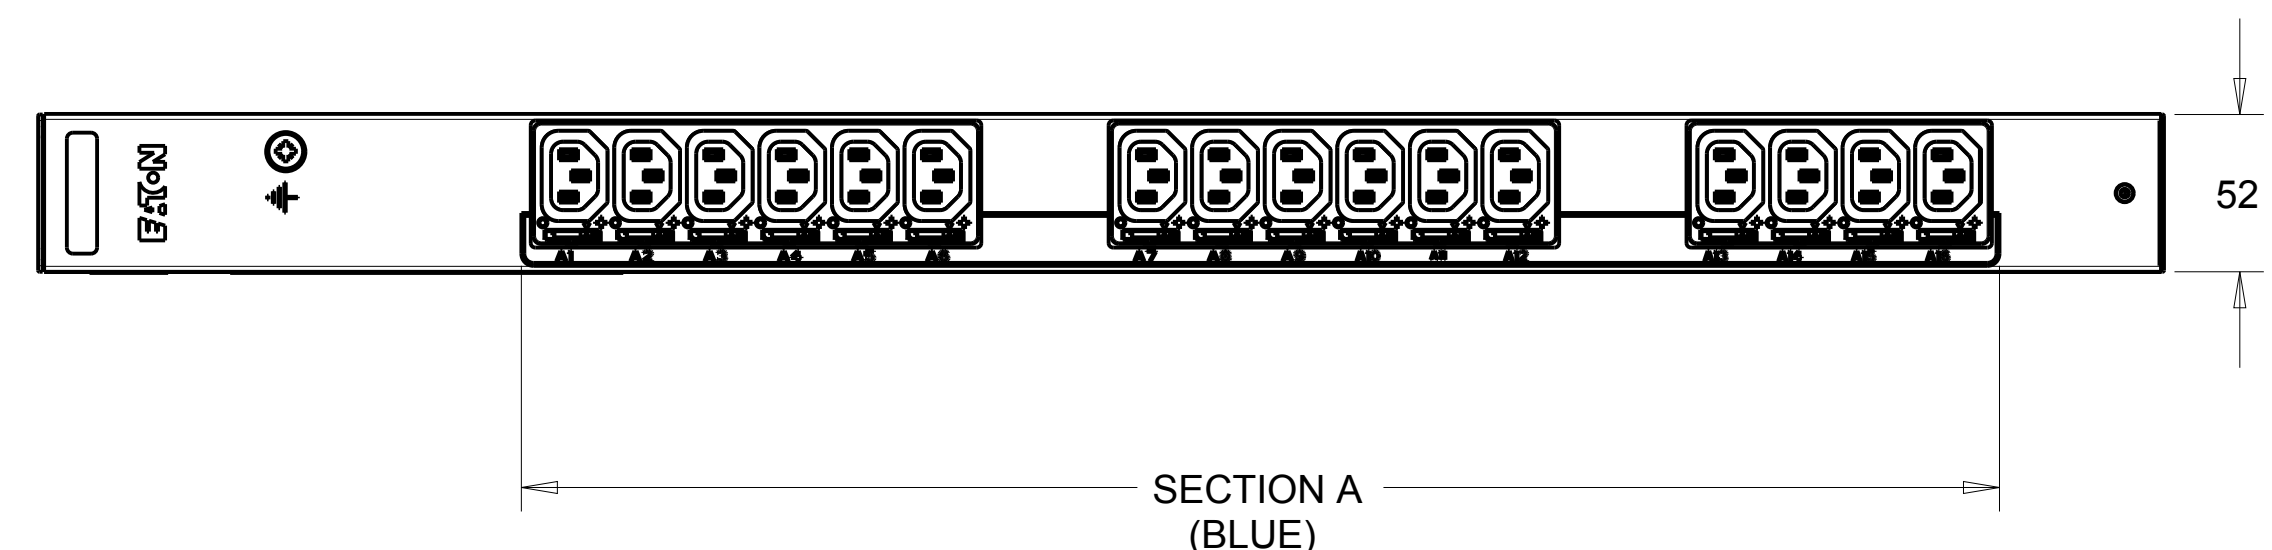

EBAB21		G3 BASIC	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	1Ø; 200-240V~;W+N+PE 50/60Hz 16A	(16) IEC 60320 C13 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 704MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	IEC 60309 C20 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	200-240V~;50/60Hz 10A PER C13 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP014 - VERT INSTALLATION PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EBA3CX8FABE72AM

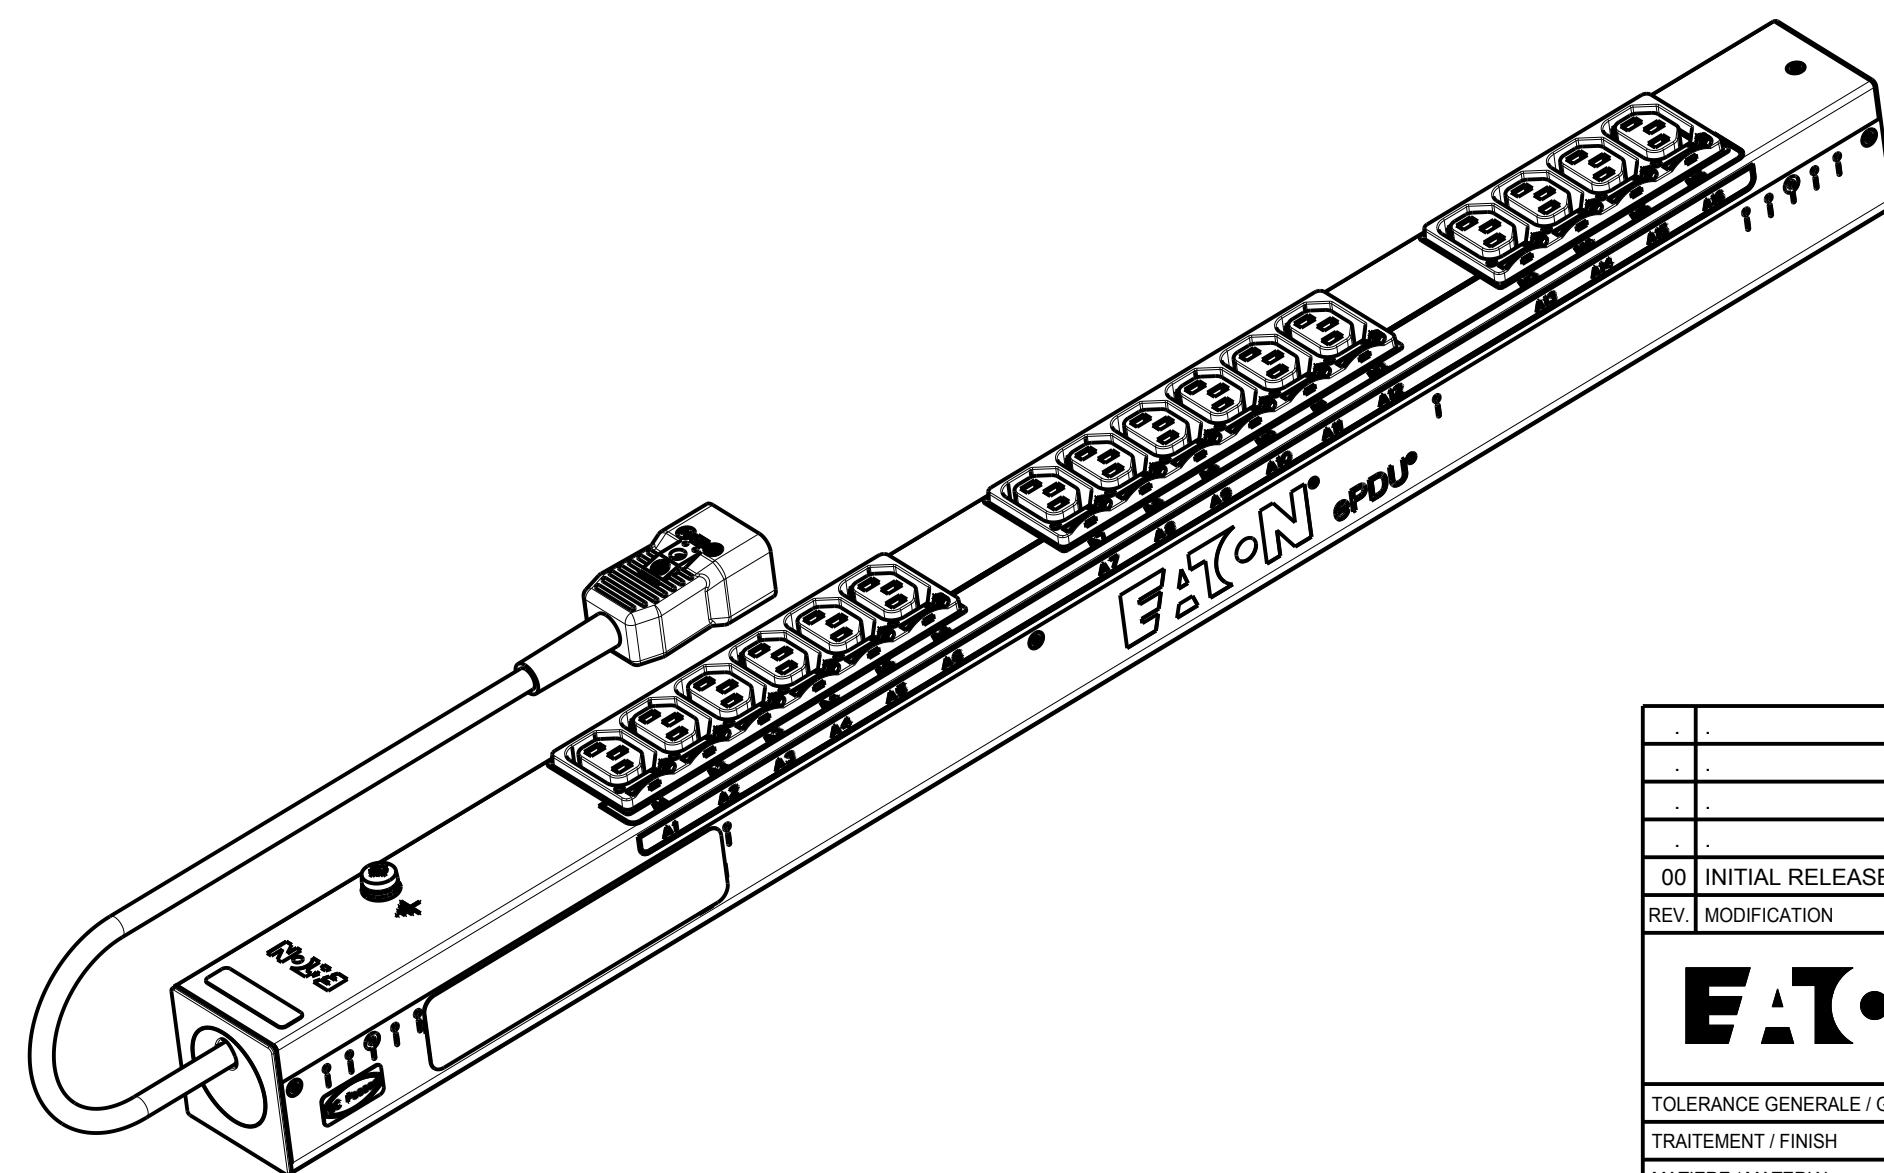

PICTORIAL VIEW
SCALE 0.400

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
00	INITIAL RELEASE		13.05.2014	RA	MB
REV.	MODIFICATION		DATE	DESS/DRAW	VERIF.
		HEINEMANN PRODUCTS		VUE/VIEW 1ST ANGLE	N° MAG EBA921
		CH-1345 LE LIEU SWITZERLAND		ECHELLE / SCALE 4/10	
				DESSINE LE / DRAWED THE	13.05.2014
				PAR / BY	RA
TOLERANCE GENERALE / GENERAL TOLERANCE		N/A	N/A	VERIFIER PAR / VERIFIED BY	MB
TRAITEMENT / FINISH		N/A	N/A		
MATIERE / MATERIAL		N/A	N/A		
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT			N/A	DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION EPDU BA 0U (C20 16A 1P)16XC13			SK-34919-Y1		00
COTES A CONTROLLER INSPECTION DIMENSIONS			COTES FONCTIONNELLES # XX.XX	NUMERO DU PLAN PLAN NUMBER	REV.
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.					