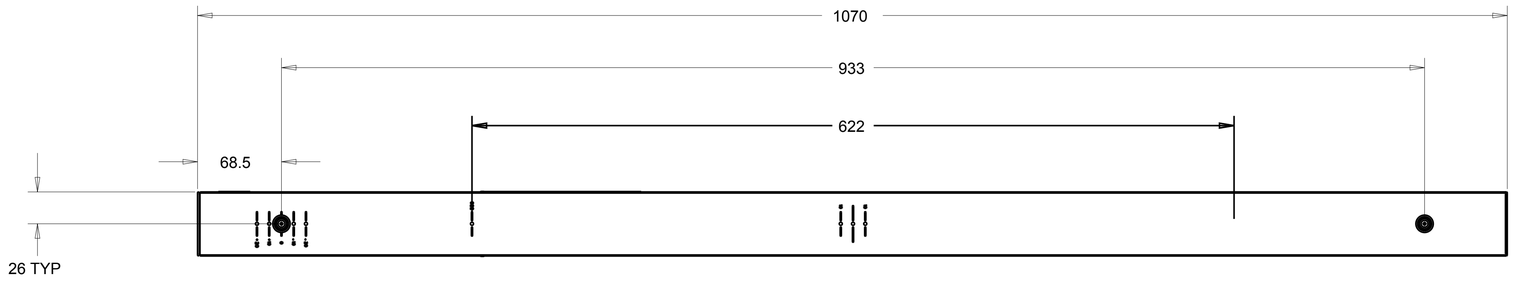

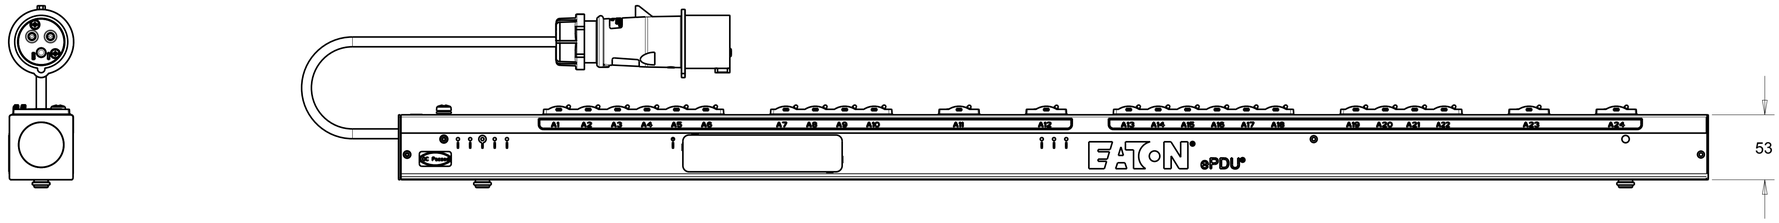

CABLE LENGTH SHOWN NOT TO SCALE

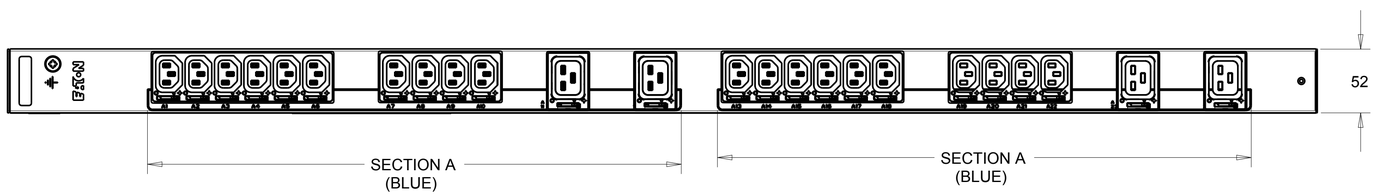

CIRCUIT SCHEMATIC

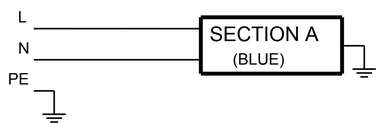

EBAB04	G3 BASIC		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	1Ø; 200-240V~;W+N+PE 50/60Hz 16A	(20) IEC 60320 C13 GRIP (4) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1070MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	IEC 60309-2 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	200-240V~;50/60Hz 10A PER C13;16A PER C19 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP014 - VERT INSTALLATION PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EBA3CE8FABH75AM

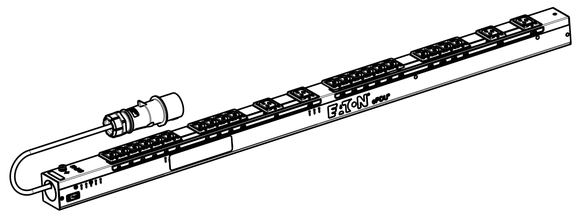

PICTORIAL VIEW
SCALE 0.187

REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.
00	INITIAL RELEASE	12.05.2014	RA	MB

EATON

HEINEMANN PRODUCTS
CH-1345 LE LIEU SWITZERLAND

VUE/VIEW 1ST ANGLE	ECHELLE / SCALE 4/10	N° MAG EBAB04	
DESSINE LE / DRAWED THE	12.05.2014		
PAR / BY	RA		
VERIFIE PAR / VERIFIED BY	MB		
TOLERANCE GENERALE / GENERAL TOLERANCE	N/A	N/A	
TRAITEMENT / FINISH	N/A	N/A	
MATIERE / MATERIAL	N/A	N/A	
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT	N/A	DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION	EPDU BA 0U (309 16A 1P)20XC13:4XC19	SK-34519-Y1	00
COTES A CONTROLER INSPECTION DIMENSIONS	XX.XX	COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS # XX.XX	NUMERO DU PLAN PLAN NUMBER / REV.

Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation.
This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.