

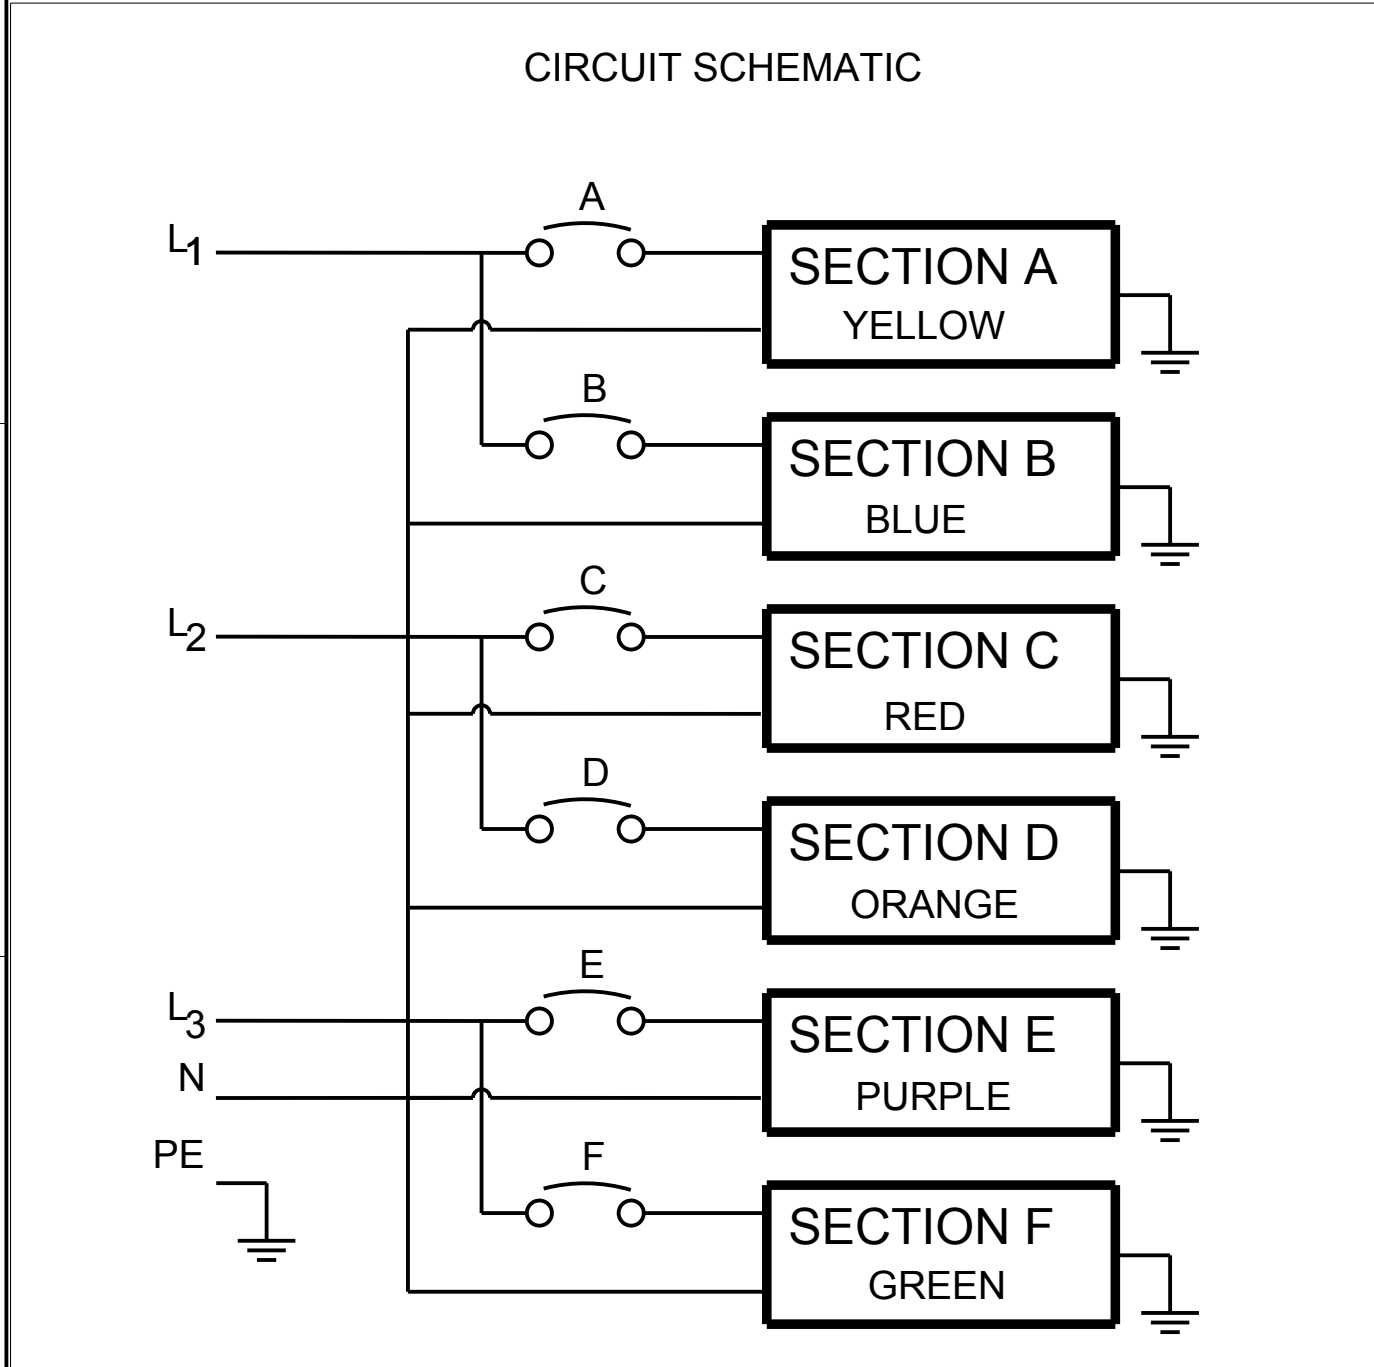


CABLE LENGTH SHOWN NOT TO SCALE

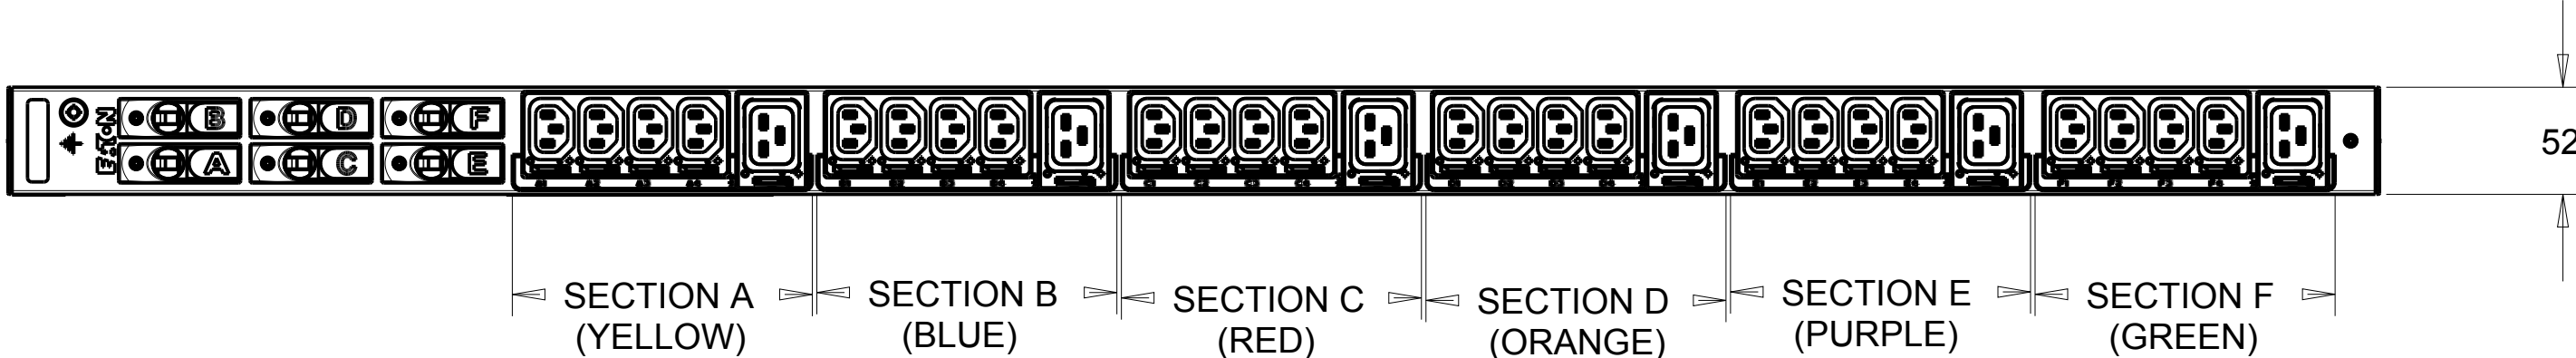

EBAB32	G3 BASIC		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	IEC 60309-2 32A 400V~ WYE, 3W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(24) IEC 60320 C13 GRIP (6) IEC 60320 C19 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1154MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø;346-415V~; WYE, 3W+N+PE 50/60HZ 32A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(6) 16A 1-POLE	NONE	STANDARD KSP026 - EPDU G3 EMEA VERT INSTALL PACK KA35	EBA3DH8FBJR76AM

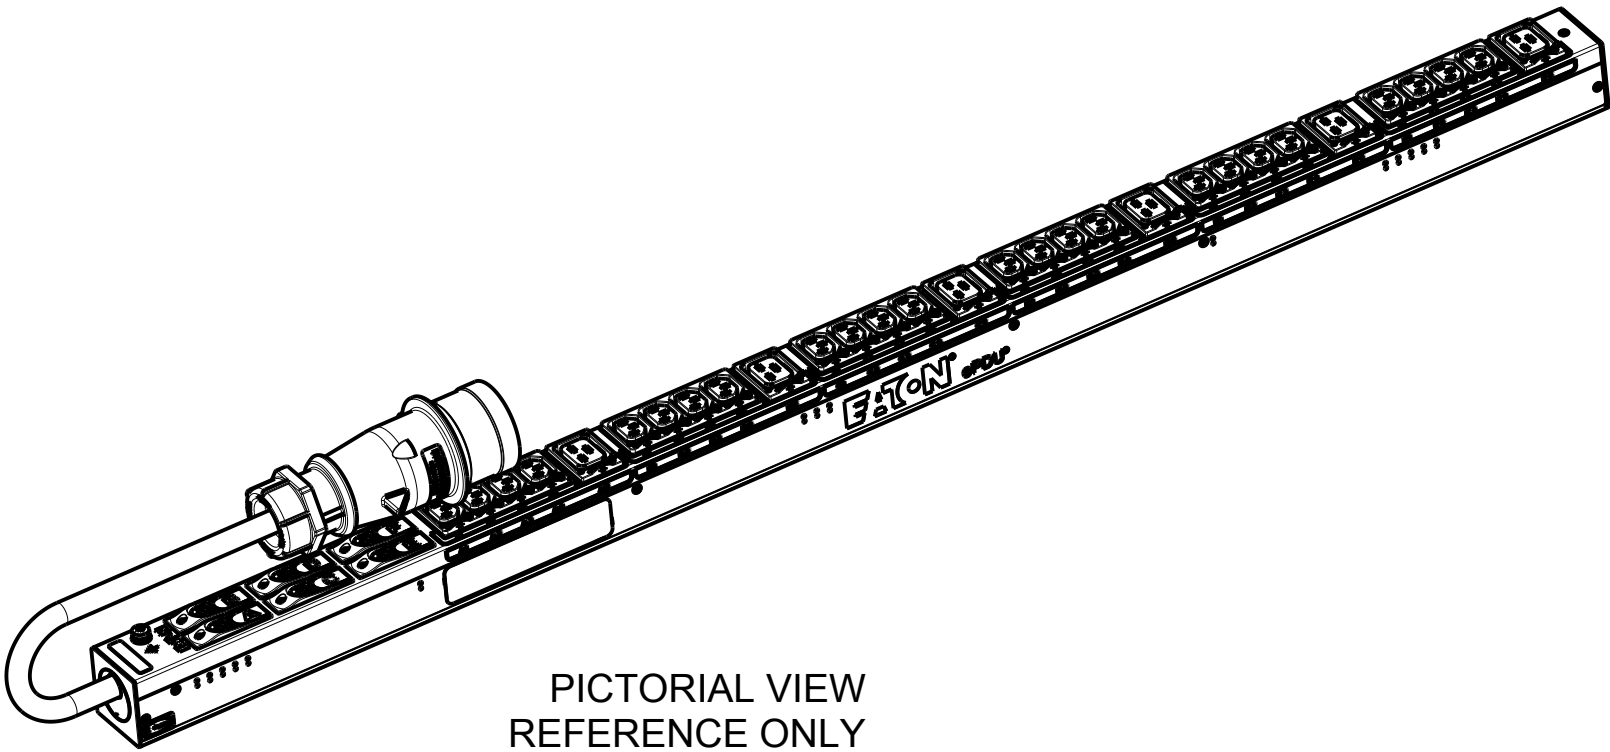

PICTORIAL VIEW
REFERENCE ONLY
SCALE 0.200

00 INITIAL RELEASE		27.04.2017	RA	MB		
REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.		
EAT•N		HEINEMANN PRODUCTS		VUE/VIEW EUROPE	ECHELLE / SCALE	N° MAG
		CH-1345 LE LIEU SWITZERLAND		3/10	EBAB32	
TOLERANCE GENERALE / GENERAL TOLERANCE		DESSINE LE / DRAWED THE		27.04.2017		
TRAITEMENT / FINISH		PAR / BY		RA		
MATIERE / MATERIAL		VERIFIE PAR / VERIFIED BY		MB		
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X		DIMENSIONS AND TOLERANCES IN MILLIMETERS		
DESIGNATION		EPDU BA 0U (309 32A 3P)24XC13-6XC19		SK-106519-Y1		00
COTES A CONTROLER		XX.XX		COTES FONCTIONNELLES		# XX.XX
INSPECTION DIMENSIONS				NUMERO DU PLAN		PLAN NUMBER
						REV.
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.						