
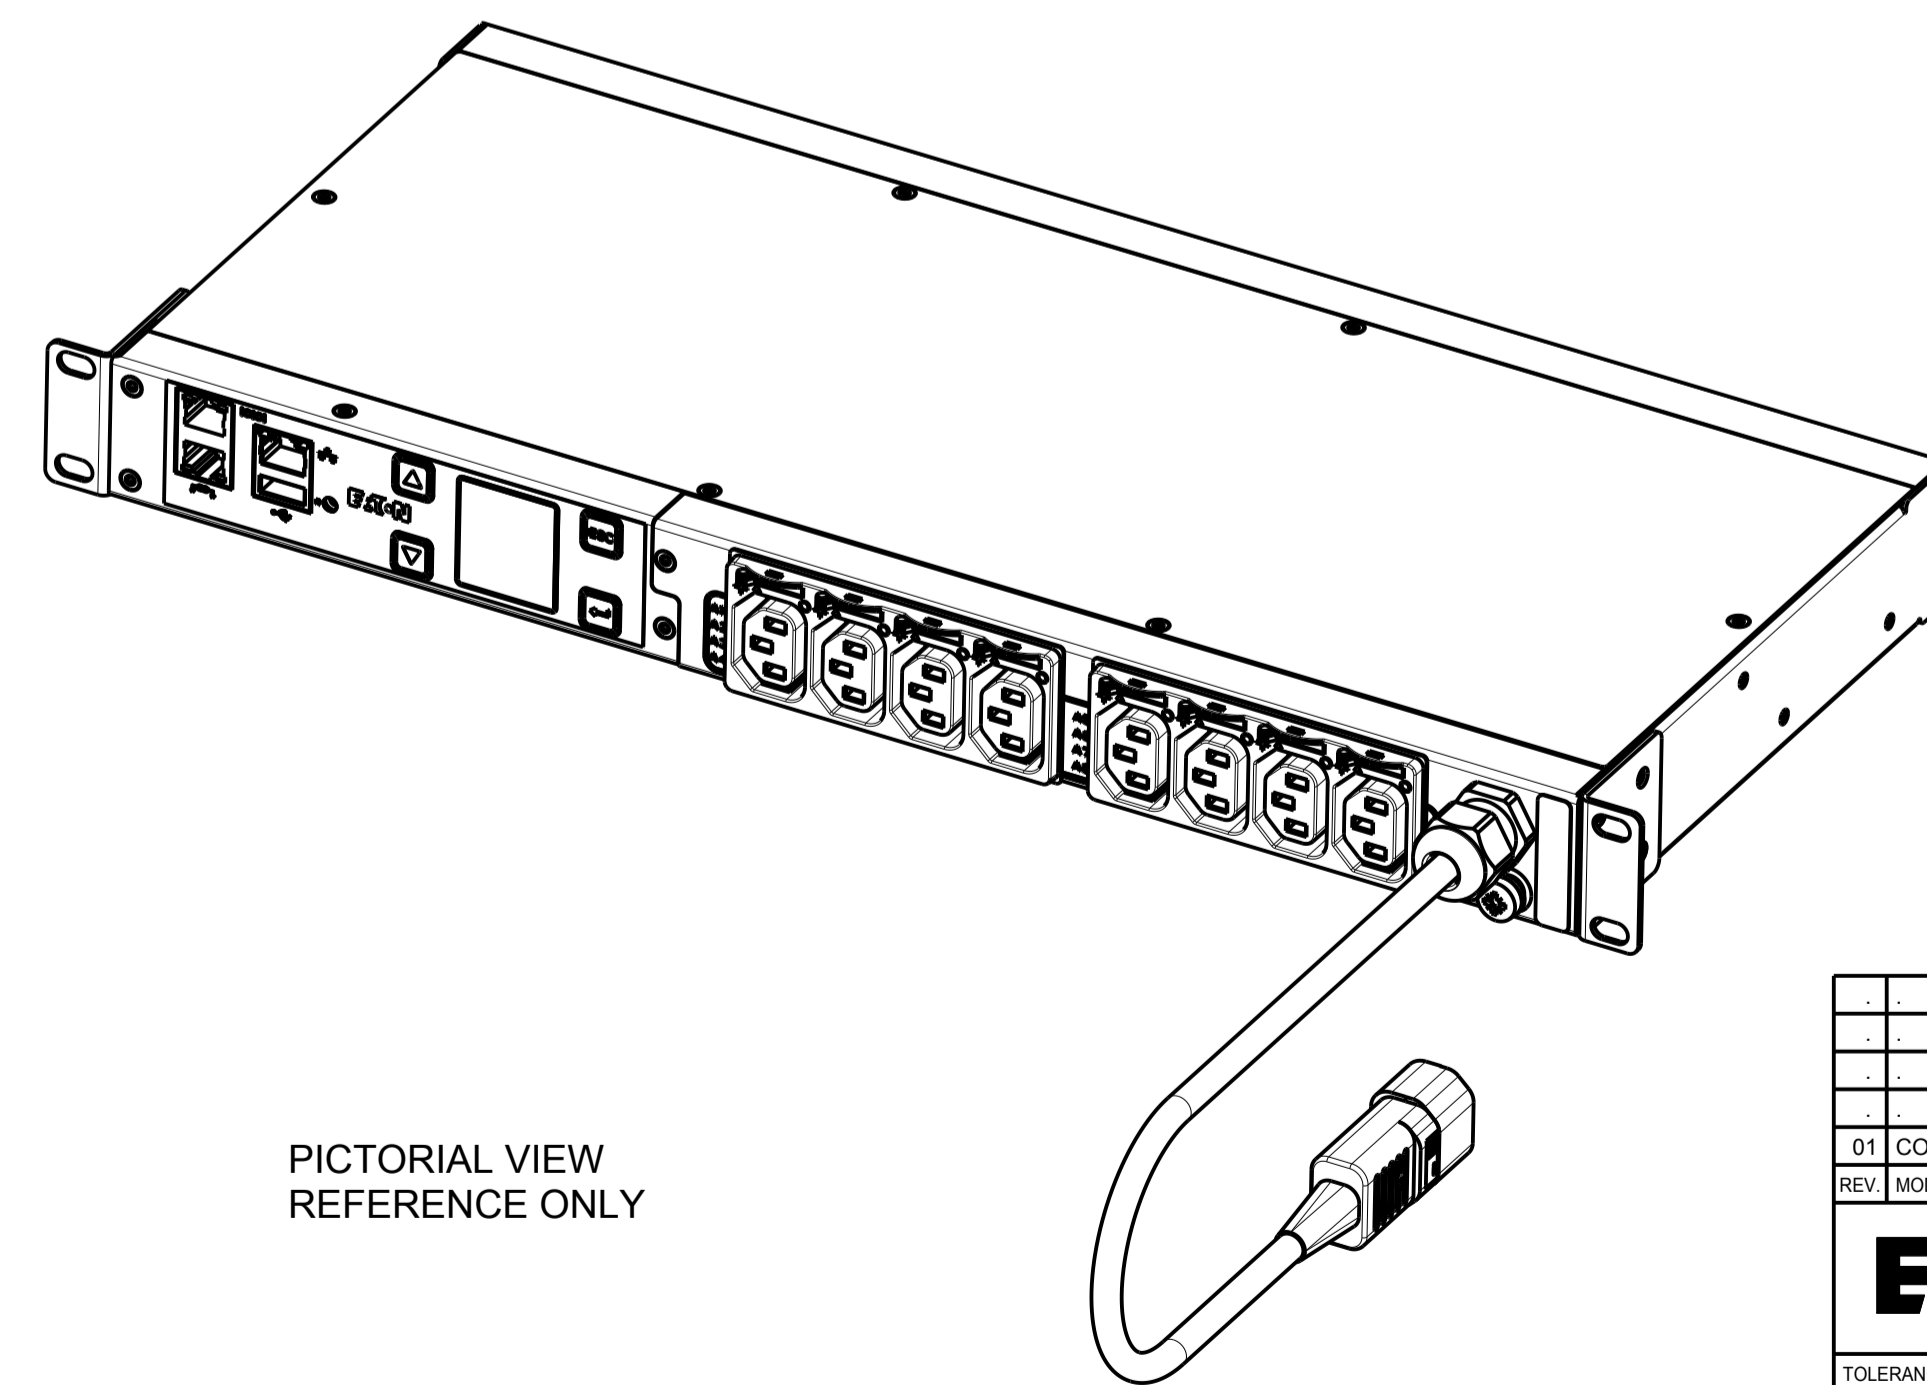


CABLE SHOWN NOT TO SCALE

CIRCUIT SCHEMATIC

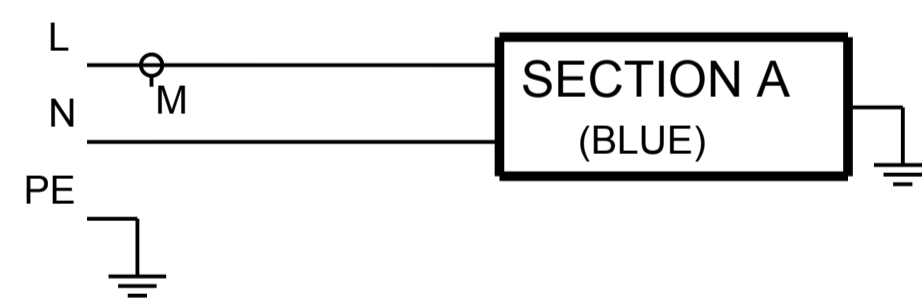

PICTORIAL VIEW
REFERENCE ONLY

EMIHO2		G3 METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309 C14 10A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(8) IEC 60320 C13 GRIP	0 TO 60 ° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 203.2MM WIDTH: 444.5 MM DEPTH: 42.9MM ALUMINIUM CHASSIS, BLACK 19 INCH RACK MOUNT	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13 10A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP011 - 1U INSTALL NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3CPHFABB13AM

01 CONFIGURATION NUMBER CORRECTION, WAS: EMI3CAHFABB13AM		DATE	DESSINER	VERIF.
REV. MODIFICATION				
EATON HEINEMANN PRODUCTS		VUE/VIEW EUROPE	ECHELLE / SCALE 1/2	N° MAG EMIHO2
CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE	19.02.2016	
TRAITEMENT / FINISH NA		PAR / BY	G.McD.	
MATERIE / MATERIAL NA		VERIFIE PAR / VERIFIED BY	M.B.	
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X		DIMENSIONS AND TOLERANCES IN MILLIMETERS		
DESIGNATION	EPDU MI 1U (C14 10A 1P)C13X8	SK-76619-Y1	01	
COTES A CONTROLER / INSPECTION DIMENSIONS	XX.XX	COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS	# XX.XX	NUMERO DU PLAN / PLAN NUMBER
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				