



APC Rack PDU, Basic, Zero U, 11 kW, 230V, (36) C13 & (6) C19 Stromverteilereinheit (PDU) 42 AC-Ausgänge 0U Schwarz

Marke : APC

Artikel-Code: AP7557

Produktname : Rack PDU, Basic, Zero U, 11 kW, 230V, (36) C13 & (6) C19

Rack PDU, Basic, Zero U, 11 kW, 230V, (36) C13 & (6) C19

APC Rack PDU, Basic, Zero U, 11 kW, 230V, (36) C13 & (6) C19 Stromverteilereinheit (PDU) 42 AC-Ausgänge 0U Schwarz:


APC Basic Rack PDU , Eingang: 400V 3PH , Eingangsanschlußart: IEC 309 16A 3P+N+PE , Kabellänge: 3 feet (0.91 Meter) , Ausgang: 230V , Ausgangsanschlüsse: IEC 320 C13,IEC 320 C19.



- Kostengünstige Stromverteilung.
- Möglichkeit zur vertikalen Montage.
- Toolless mounting capability.
- Mehrfach-Stromversorgung.

APC Rack PDU, Basic, Zero U, 11 kW, 230V, (36) C13 & (6) C19. PDU-Typen: Standard, Rack-Kapazität: 0U, Montage: Senkrecht. Anzahl der AC-Ausgänge: 42 AC-Ausgänge, AC-Steckertypen: C13-Koppler, C19-Koppler, Eingang Verbindungstyp: IEC 309 16A 3P+N+PE. Kabellänge: 0,91 m, Zertifizierung: C-tick,CCC,CE,GOST,MIC,Queensland Australia,VD. Nominale Eingang Spannung: 400 V, AC Eingangsfrequenz: 47/63 Hz, Nominale Ausgang Spannung: 230 V. Abmessungen (BxTxH): 56 x 44 x 1619 mm, Gewicht: 5,45 kg

Design		Leistung	
PDU-Typen *	Standard	Ladekapazität	11040 VA
Rack-Kapazität *	0U	Maximaler Eingang Strom pro Phase	16 A
Montage	Senkrecht	Maximale Gesamtstromaufnahme pro Phase	16 A
Produktfarbe	Schwarz	Max. Leistung	11000 W
Anschlüsse und Schnittstellen		Gewicht und Abmessungen	
Anzahl der AC-Ausgänge *	42 AC-Ausgänge	Abmessungen (BxTxH)	56 x 44 x 1619 mm
AC-Steckertypen *	C13-Koppler, C19-Koppler	Gewicht	5,45 kg
Eingang Verbindungstyp	IEC 309 16A 3P+N+PE	Betriebsbedingungen	
Ausgang Anschlüsse	(36) IEC 320 C13 (6) IEC 320 C19	Betriebstemperatur	-5 - 45 °C
Merkmale		Temperaturbereich bei Lagerung	-25 - 65 °C
Kabellänge	0,91 m	Relative Luftfeuchtigkeit in Betrieb	5 - 95%
Zertifizierung	C-tick,CCC,CE,GOST,MIC,Queensland Australia,VD	Luftfeuchtigkeit bei Lagerung	5 - 95%
Leistung			
Nominale Eingang Spannung *	400 V		
AC Eingangsfrequenz	47/63 Hz		
Nominale Ausgang Spannung	230 V		

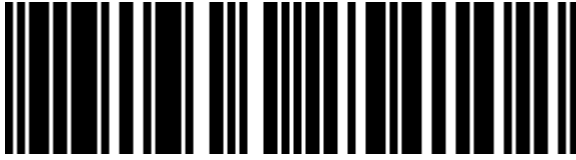

0731304254102



731304254102

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.